



# UPDATED SURVEY

## D.U.V.R.I.

Unified Document for the Assessment of Interference Risks among concomitant activities carried out in the same work environment  
(pursuant to the provisions of Art. 26 of Italian Leg. Decree 81/2008 and amendments)


### English version

(Courtesy translation. If for any reason an interpretation is needed, reference must be made to the Italian text only)

**XYLEXPO Composites Future 2026**

9-12 june 2026

Exhibition Centre: **fieramilano**

Rev.	Date	Organiser	Manager Company of the Exhibition Centre
0.0	13/05/2026	CEPRA S.r.l. Unipersonale	 <b>FIERA MILANO</b>
		Contact person of the Organiser for the exhibition safety (RSO) Dott. Ing. Matteo Simonetta	

## CONTENTS

<b>1. Introduction</b>	3
<b>2. Definitions</b>	3
<b>3. General information</b>	4
3.1 Manager of the Exhibition Centre	4
3.2 Exhibition Organiser	5
3.3 Scheme of Contractual relations	6
3.4 Description of the typical work stages of the events	7
3.5 Fiera Milano and Organiser Contractors	7
3.6 Verification of technical and professional suitability of contracted companies and self-employed workers	7
<b>4. Information on the Exhibition Centre</b>	8
4.1 General information	8
4.2 Information about the Exhibition Centre emergency plan	9
4.3 Active safety services and facilities	13
<b>5. Description of the event</b>	14
5.1 Type of event	14
5.2 Date	14
5.3 Place	14
5.4 Operating timing	14
<b>6. Information on Environmental Risks in the Exhibition Centre and implemented preventive measures</b>	16
<b>7. Information on risks specific to processes and risk assessment</b>	25
7.1 Criteria for drafting the document	25
7.2 List of activities carried out by the Manager's Contractors	26
<b>8. Safety costs</b>	27
8.1 Safety costs to eliminate or reduce interference	27
8.2 Safety costs related to the Contractor's business operations	27
<b>9. Annexes</b>	28
9.1 Safety documents present on Fiera Milano internet portal	28
9.2 Safety documents present on Organizer internet site	28
9.3 D.U.V.R.I. annexes	28

## 1. Introduction

This D.U.V.R.I. (Unified Document for the Assessment of Interference Risks) document was prepared pursuant to art. 26, paragraph 3(c) of the Italian Legislative Decree 81/08, and aims to inform Exhibitors of possible interference risks, through a survey assessment of the standard risks related to the type of service, which could potentially arise from the preparation, assembly, disassembly and post-disassembly activities of the exhibition. The D.U.V.R.I. it also allows the Exhibitors to fulfill the obligations provided by the Interninisterial Decree 22-7-2014 (known as the "Decreto Palchi"), or the preparation of the D.U.V.R.I. or the application of Title IV of the Legislative Decree 81/08 as employer customers.

## 2. Definitions

<b>Manager of the Exhibition Centre</b>	<i>Legal entity managing the Exhibition Centre</i>
<b>Organiser</b>	<i>Legal entity organising the exhibition</i>
<b>Customer</b>	<i>Entity on whose behalf the entire work is carried out, regardless of any splitting of its implementation</i>
<b>Exhibitor</b>	<i>Company, or other legal entity, participating in the exhibition with availability of a specific area</i>
<b>Fitter</b>	<i>Entity which is the holder of the contract for the stand assembly and disassembly and possible construction of the exhibition structures</i>
<b>Exhibition centre</b>	<i>fixed structure, or other space intended to host the exhibition, with its own logistical organisation and related practicability, intended for exhibitions</i>
<b>Stand</b>	<i>a single area dedicated to the participation by the Exhibitor in the exhibition</i>
<b>Fitted complementary spaces</b>	<i>Area fitted for conference rooms, shows, offices and other services in support of the exhibition</i>
<b>Fitting structure</b>	<i>set of elements used to fit up a stand or a fitted complementary space</i>
<b>Tent structure</b>	<i>load-bearing structure with cover sheet, both open and closed at the sides</i>
<b>Self-employed person</b>	<i>Natural person whose professional activity contributes to the realisation of the work without any subordination obligation</i>
<b>Interference risks</b>	<i>Circumstance in which there is risky contact between the Customer's and the Contractor's personnel or between the personnel of different companies operating simultaneously in the same company area with independent contracts</i>
<b>DDLS</b>	<i>Employer Delegate for Safety</i>
<b>RSG</b>	<i>Contact person of the Manager for the exhibition safety, appointed by the Manager to interface on exhibition safety issues with the contact persons appointed by the Organiser and the Exhibitor</i>
<b>RSO</b>	<i>Contact person of the Organiser for the exhibition safety, appointed by the Organiser to interface on exhibition safety issues with contact persons appointed by the Manager and the Exhibitor</i>
<b>RSE</b>	<i>Contact person of the Exhibitor for the exhibition safety, appointed by the Exhibitor to interface on exhibition safety issues with the contact persons appointed by the Manager and the Organiser</i>

### 3. General information

#### 3.1 Manager of the Exhibition Centre

Company name:	Fiera Milano S.p.A.
Registered Office:	P.le Carlo Magno, 1 – 20149 Milano
Administrative Headquarters:	Largo Fiera Milano n. 5 - 20017 Rho (MI)
Operational Headquarters:	S.S. del Sempione, 28 - 20017 Rho (Milano)
E-mail (PEC)	<a href="mailto:sicurezza@pec.fieramilano.it">sicurezza@pec.fieramilano.it</a>
Health & Safety Office contacts (For DUVRI info)	<a href="mailto:sicurezza.mostra@fieramilano.it">sicurezza.mostra@fieramilano.it</a>
VAT no.	13194800150
Number of CCIAA:	REA MI n.1623812
INPS - SOCIAL SECURITY no.:	4960700978/02
Chief Executive Officer:	Francesco Conci
Employer's Delegate for Safety and the Environment	Alessandro Pavesi <a href="mailto:alessandro.pavesi@fieramilano.it">alessandro.pavesi@fieramilano.it</a>
Employer's Delegate for Food Safety	Simona Capettino <a href="mailto:simona.capettino@fieramilano.it">simona.capettino@fieramilano.it</a>
Head of the Prevention and Protection Service (RSPP):	Roberto Loporati <a href="mailto:roberto.leporati@fieramilano.it">roberto.leporati@fieramilano.it</a>
Sub-delegate of the DDL for the assessment of interferential risks pursuant to Art. 26 of the Legislative Decree. 81/08	Donato Cornacchia <a href="mailto:donato.cornacchia@fieramilano.it">donato.cornacchia@fieramilano.it</a>
Workers' Safety Representatives (RLS)	Cristian Broussard <a href="mailto:cristian.broussard@fieramilano.it">cristian.broussard@fieramilano.it</a>
	Donato Pavesi <a href="mailto:donato.pavesi@fieramilano.it">donato.pavesi@fieramilano.it</a>
Competent Doctor Coordinator	Dott. Giorgio Codecà <a href="mailto:s.rondina@apgroupsrl.it">s.rondina@apgroupsrl.it</a>

N.B: Fiera Milano, in accordance with its corporate mission, adopts an integrated and certified system as detailed below:


- ISO 20121: Event Sustainability Management System;
- ISO 14001: Environmental Management System;
- ISO 9001: Quality Management System;
- ISO 37001: Anti-Bribery Management System;
- ISO 45001: Occupational Health and Safety Management System.

All certifications obtained are applied to the design, delivery, organization, and hosting of trade fairs and the provision of related support services.

### 3.2 Exhibition Organiser

Company name:	CEPRA S.r.l. Unipersonale
Registered office:	Milano Fiori 1a Strada, Palazzo F3 – 20057 Assago (Mi)
Contacts:	Tel. 02.89210239 Altro tel. 02.89210200
	<a href="http://www.xylexpo.com">www.xylexpo.com</a>
	Email: <a href="mailto:tecni@acimall.com">tecni@acimall.com</a>
VAT no.:	04701000152
Number of the Chamber of Commerce, Industry, Craftsmanship and Agriculture:	REA MI n. 1031986
INPS - SOCIAL SECURITY no.:	4931013405/00
Legal representative and Chief Executive Officer CEO:	Ing. Dario Corbetta <a href="mailto:direzione@acimall.com">direzione@acimall.com</a>
Contact person for the exhibition safety (RSO)	Dott. Ing. Matteo Simonetta <a href="mailto:tecni@acimall.com">tecni@acimall.com</a>
Head of the Prevention and Protection Service (RSPP):	Ing. Graziano Galasso, SILAQ CONSULTING srl <a href="mailto:graziano.galasso@silag.it">graziano.galasso@silag.it</a>
Company doctor:	Dott. Lorenzo Tucci
Head of Stand Allocation and General Services	Sig. Davide Rao <a href="mailto:sales2@xylexpo.com">sales2@xylexpo.com</a>
Head of Incoming Delegations	Sig. Piero Borroni <a href="mailto:promozione@acimall.com">promozione@acimall.com</a>

3.3 Scheme of Contractual relations

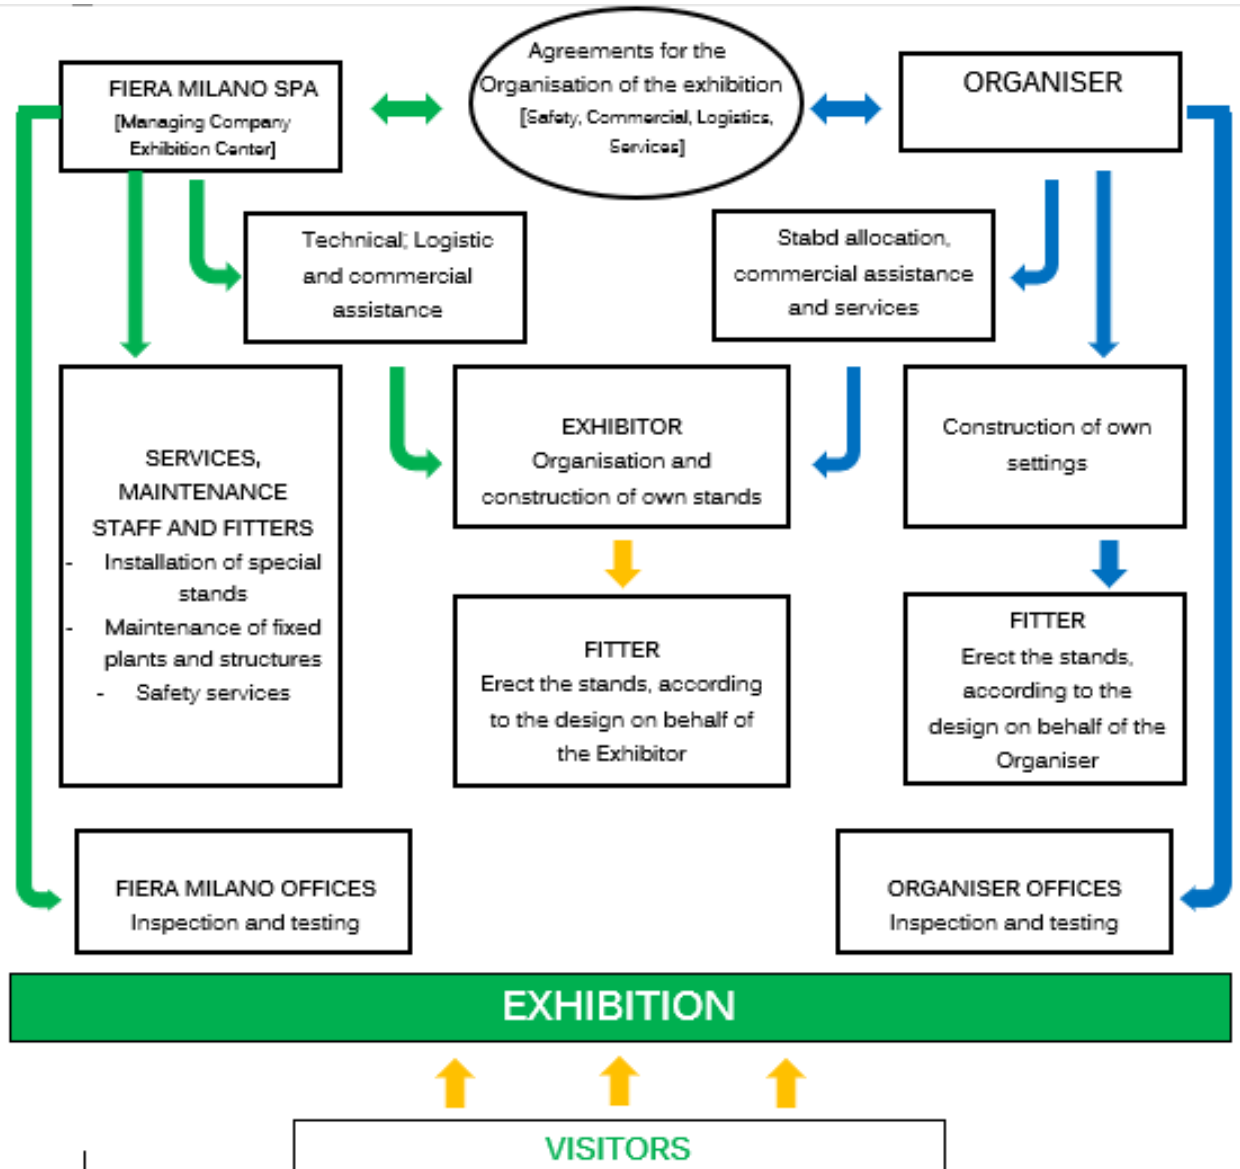

### 3.4 Description of the typical work stages of the events

#### Preparation area

The preparation phases that anticipate the assembly, for example, are:

- cleaning of spaces;
- ground marking of stands and special areas;
- preparation for ceiling suspensions (e.g. hangers for ceiling hook structures, special technological systems);
- laying of carpet;
- preparation of technological systems serving the stands;
- assembly of pre-fitted stands;
- signposting.

#### Assembly

All activities that take place during a specific period of time, defined by the Manager/Organiser, prior to the individual exhibition, and that include, for example, access of vehicles, loading and unloading of goods even with the use of lifting equipment, stand assembly, etc.

#### Exhibition

The exhibition phase consists of the execution of the event.

#### Disassembly

All activities that take place during a specific period of time, decided by the Manager/Organiser, after the exhibition, and that include, for example, access of vehicles, loading and unloading of goods even with the use of lifting equipment, stand disassembly, etc.

#### Restoration

After disassembly, activities are planned for the original restoration of the halls, in which only the Contractors of the Manager/Organiser operate, with the following activities (listed in a non-exhaustive list): removal of waste and cleaning of spaces, removal of ceiling suspensions (hangers for ceiling hook structures, signposting, special technological systems), removal of carpet, removal of technological systems serving the stands, signposting.

### 3.5 Fiera Milano and Organiser Contractors

The list of contractors and self-employed workers appointed by Fiera Milano and the Organizer, with the work schedule, is available in **Annex 1** of this D.U.V.R.I.

It should be noted that the construction of the pre-fitted stands commissioned from Fiera Milano, was contracted out to the company Nolostand Spa which developed a single document (DVRS) containing the assessment of the risks deriving from the various work activities and accompanied by a specific time schedule that highlights the sequence of carrying out the same activities.

Regarding the construction of customized stands commissioned to Fiera Milano, the activity will be carried out by third-party setup teams, and safety aspects will be managed through the drafting of a dedicated DUVRI (or PSC).

### 3.6 Verification of technical and professional suitability of contracted companies and self-employed workers


The technical and professional suitability of the Contracted companies and self-employed workers appointed by Fiera Milano and Organiser has been verified in compliance with the provisions of Article 26, paragraph 1 lett. a) of the Italian Legislative Decree 81/2008 and the current regulations, acquiring the prescribed documents.









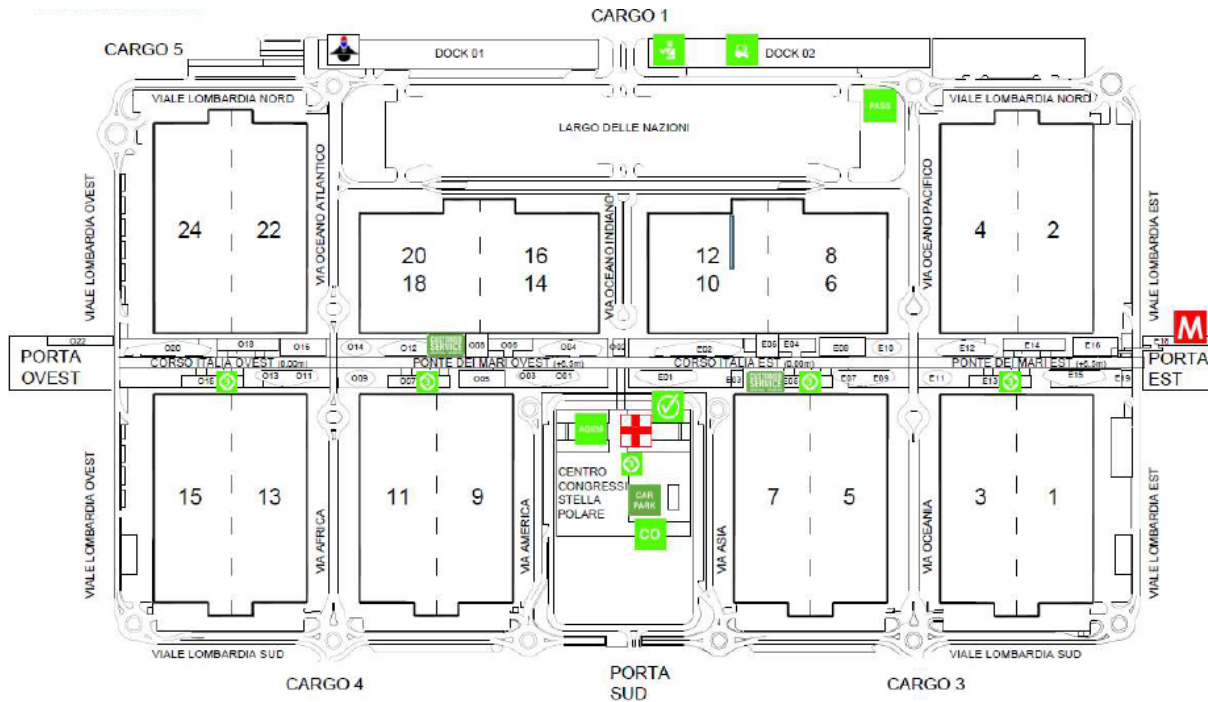



## 4. Information on the Exhibition Centre

### 4.1 General information

Information concerning the safety of the Exhibition Centre, in accordance with current and applicable legislation, is available on the Manager's website ([www.fieramilano.it](http://www.fieramilano.it), in the link to the Exhibition, in the "Exhibitors - Technical Information" section), under the heading "Exhibition Centre Safety Descriptive File".

General floor plan of the Exhibition Centre:



- |   |  |   |  |
|---|--|---|--|
|  | <b>Assistenza Espositori</b><br><i>Exhibitors Assistance Service</i>     |  | <b>Carabinieri</b>   |
|  | <b>Centrale Operativa Emergenze</b><br><i>Emergency Operation Centre</i> |  | <b>Uffici Doganali</b><br><i>Customs Office</i>  |
|  | <b>Controllo Allestimenti</b><br><i>Fitting Up Control Office</i>        |  | <b>Spedizioniere Ufficiale</b><br><i>Official Forwarder</i>  |
|  | <b>Amministrazione Espositori</b><br><i>Exhibitors Accounting Office</i> |  | <b>Ufficio Logistica – Rilascio pass aggiuntivi per allestimento e smontaggio</b><br><i>Logistic Office - Additional entry passes for fitting-up and dismantling</i> |
|  | <b>Primo Soccorso</b><br><i>First Aid</i>                                |  | <b>Ufficio Logistica Quartiere – Rilascio pass parcheggio Espositore</b><br><i>Exhibition Centre Logistic Office – Issue of Exhibitor parking passes</i>             |
|  | <b>Bancomat</b><br><i>Cash Dispenser</i>                                 |   |  |
|  | <b>Metropolitana</b><br><i>Metro</i>                                     |   |  |

## 4.2 Information about the Exhibition Centre emergency plan

The Emergency Plan is drawn up to ensure the timely dissemination to all persons present within the exhibition center of the operating procedures and behavioral rules to be adopted in the event of a critical event or dangerous situation.

It defines in a structured manner the responsibilities, the methods for activating response measures, the information flows, and the coordination actions necessary to ensure effective intervention consistent with the nature of the emergency.

Contractors and self-employed workers authorized to operate within the exhibition center were formally informed of this plan upon signing the contract, by providing the relevant documentation and verifying that they had read it.

**TO ACTIVATE THE EMERGENCY MANAGEMENT OPERATIONS CENTRE, DIAL:**

**02 4997 7210**

An excerpt is given below.

### 1. Introduction

Legislative Decree 81/08 comprehensively regulates measures aimed at protecting the health and safety of workers in both public and private workplaces through the transposition and implementation of relevant European directives. The regulation establishes an integrated prevention and protection system based on risk assessment, reduction, and control, assigning specific responsibilities, obligations, and sanctions to the various parties who, in various capacities, participate in the safety management process.

Specifically, it requires the adoption of all technical, organizational, and procedural measures necessary to prevent the outbreak of fires and to limit their effects should they occur. These measures include, among other things, the preventive designation of workers responsible for implementing fire prevention procedures, firefighting, evacuation in the event of serious and immediate danger, rescue operations, first aid, and, more generally, coordinated emergency management. The identified personnel must be adequately trained, instructed, and periodically updated for their assigned tasks.

In compliance with these provisions, Fiera Milano has developed an Emergency Plan tailored to the operational and logistical complexity of the events hosted at the Exhibition Centre, which are characterized by high variability in terms of attendance, type of installations, work cycles, and the presence of external operators.

Considering that the effectiveness of an Emergency Plan depends on the speed, coordination, and consistency of the actions undertaken by the parties involved, and considering that, due to the very nature of trade fair events, neither exhibitors nor visitors can be trained in advance to deal with emergencies, Fiera Milano has established a dedicated service, staffed by qualified personnel, for the operational management of emergencies.

In the event of an emergency, all persons present in the exhibition centre are required to strictly follow the instructions given by security and surveillance personnel. Upon request, they must leave work or exhibition areas in an orderly manner, after turning off or securing their systems and equipment.

This document is intended to provide Exhibitors and Organizers with the behavioral requirements to be adopted in the event of events classified as "Emergency Situations" and to require them to disseminate this information to all parties operating on their behalf within the exhibition center.

"Emergency Situations" are defined as all anomalous events that, due to their nature and potential severity, require a pre-planned, verified, and tested emergency response plan to enable effective management under controlled conditions.

In designing the Emergency Plan, all factors that, due to their presence, variability, or state at the time of the event, could influence the implementation of the planned procedures were analyzed and considered, including those of a structural, organizational, plant, and environmental nature.

## 2. Events classified as “Emergency Situations”

Events considered “Emergency Situations” are:

Case no. 01	Evacuation
Case no. 02	Extensive fire
Case no. 03	Health emergency
Case no. 04	Structural collapse or failure
Case no. 05	Threats or acts of sabotage
Case no. 06	Explosion
Case no. 07	Flammable gas leak
Case no. 08	Minor fire
Case no. 09	Natural disaster
Case no. 10	Boiler power plant failure
Case no. 11	Accident in areas managed by third parties
Case no. 12	Blackout
Case no. 13	Helipad accident
Case no. 14	Photovoltaic system fire
Case no. 15	Company at risk of major accident
Case no. 16	Extensive health emergency
Case no. 17	Accidental spill of substances
Case no. 18	Snow emergency

## 3. Purpose of the Plan

The Emergency Plan is designed to systematically define operational procedures and the first actions to be taken in the event of an emergency, ensuring the following priority objectives are achieved as quickly as possible:

- Ensuring the safety and security of personnel;
- Securing process plants and operating facilities;
- Containment and containment of any fires or other emergencies;
- Protection and safeguarding of property, equipment, and infrastructure;
- Complete resolution of the emergency and return to controlled operating conditions.

To achieve these objectives, it is essential that the following operational principles be observed:

- Immediate activation of emergency procedures: anyone who detects an emergency or potential emergency must act promptly, following established procedures and immediately contacting the Operations Center. Upon receiving the report, the Operations Center will activate the necessary rescue and resources depending on the type of event.
- Synergistic coordination of interventions: the emergency must be managed through integrated actions, orderly behaviors, and shared procedures, so that each operator knows in advance their role, operational responsibilities, and methods of cooperation with other parties involved in the rescue.
- Clear lines of command and communication: All operators must be fully aware of who to contact for instructions, who to inform about the situation, and the communication channels and methods to use.
- Continuous monitoring by the Operations Center: The Operations Center must maintain constant, up-to-date knowledge of the emergency situation to effectively coordinate the necessary internal and external resources, ensuring timely and consistent interventions.

#### 4. Information

To ensure a controlled and safe progression of an event classified as an "emergency," it is essential that everyone involved performs the essential operations according to the pre-established sequence, integrating them in a coordinated manner with the actions of other operators and adhering to the defined operating procedures.

To this end, during all operational phases of trade fair events, including pre-assembly, installation of stands, the exhibition opening period, and dismantling, Exhibitors are required to strictly comply with the safety provisions set out in the Technical Regulations and to familiarize themselves with the work environment. They must:

- orient themselves correctly within the assigned pavilion, identifying escape routes, emergency exits, and available fire prevention equipment by consulting the Evacuation Plan plans displayed on site;
- garner advance information on the access routes to designated emergency assembly and meeting points, so that they can reach them quickly and safely if necessary.

These measures are aimed at ensuring the effectiveness of the emergency plan, minimizing risks to people and reducing response times in the event of a critical event.

#### 5. Collaboration with security personnel and emergency relief

The best way to collaborate with security personnel is to not interfere with their work and only at their request to offer your skills and experience, as well as your knowledge of the locations, machinery, and other equipment on display.

Effective collaboration with security personnel presupposes full respect for the operations they conduct, avoiding any interference in emergency management activities. The contribution of those present (exhibitors, workers, or operators) must occur exclusively at the express request of the designated personnel, limiting themselves to providing:

- their professional expertise and experience;
- their knowledge of the locations, systems, machinery, and equipment on display;
- any information useful for correctly assessing the situation and coordinating operations.

This principle ensures full operational coherence and the safety of all stakeholders, avoiding uncoordinated actions that could compromise the effectiveness of emergency interventions.

#### 6. General Behavior in an Emergency

In an emergency, the following operational requirements must be strictly adhered to:

- Remain calm: Maintain mental clarity to correctly assess the situation and react consciously;
- Avoid generating panic: Refrain from behaviors or communications that could spread fear or confusion among those present;
- Immediately report the event to the Operations Center: Provide precise information on the type of emergency, its location, and its severity;
- Move in an orderly manner: Scrupulously follow the designated escape routes, avoiding rushing, disorderly movements, or any action that could hinder evacuation;

- Assist people in difficulty: Help only if you are certain, you can do so safely, without compromising your own safety or that of others.
- Comply with the procedures set forth in the Emergency Plan: strictly observe the provisions of this document and follow the instructions given by security personnel without exception;

Do not re-enter the building until the Operations Center or security personnel have communicated that safety conditions have been fully restored.

## 7. Emergency Call

Anyone present in the exhibition center is authorized to immediately activate emergency services by contacting the Operations Center at:

**02.4997.7210**

The emergency call procedure must be carried out clearly, quickly, and completely, providing the essential information to allow for a timely and accurate assessment of the event. In particular, the following must be communicated:

- Location of the event: indicate precisely the pavilion, hall, or floor involved;
- Type of incident: specify the nature of the event (e.g., fire, flooding, structural collapse, illness, etc.);
- Extent of the incident: describe the extent of damage to people, systems, equipment, or structures;
- Presence of injuries: indicate whether any people were involved and, if known, the number of injured;
- Caller information: provide name, surname, and, if available, a telephone number for any additional communications.

While communicating with the Operations Center, the latter simultaneously alerts the dedicated intervention teams, made up of emergency management personnel, coordinating their activity in real time to ensure an effective and timely response.

## 8. Evacuation Procedures

### WHO:

All persons present inside the building, except for emergency personnel, who are responsible for the operational management of the event.

### WHEN:

The evacuation order is issued by the Head of the Security Institute (Emergency Coordinator).

However, visitors and staff may leave the building even without a formal order if they believe they are in immediate danger. In any case, everyone is required to strictly follow the procedures described in this Emergency Plan.


### HOW:

Evacuation operations must be carried out according to the following operating procedures:

- Remain calm, maintaining a clear head, and avoiding behavior that could cause confusion or panic;
- Use only the designated evacuation routes, marked and highlighted on the plans displayed inside the building;
- Do not use unauthorized elevators or alternative routes, as they may compromise safety and the proper flow of people;
- Reach the external assembly points (assembly zones) indicated in the attached plans. Personnel must not leave the assembly zones until they receive official instructions from the Operations Center or security personnel.

These provisions ensure an orderly and safe flow of people, allowing personnel to operate effectively in the containment and management of the emergency.

9. Neighborhood meeting points foreseen by the emergency plan:

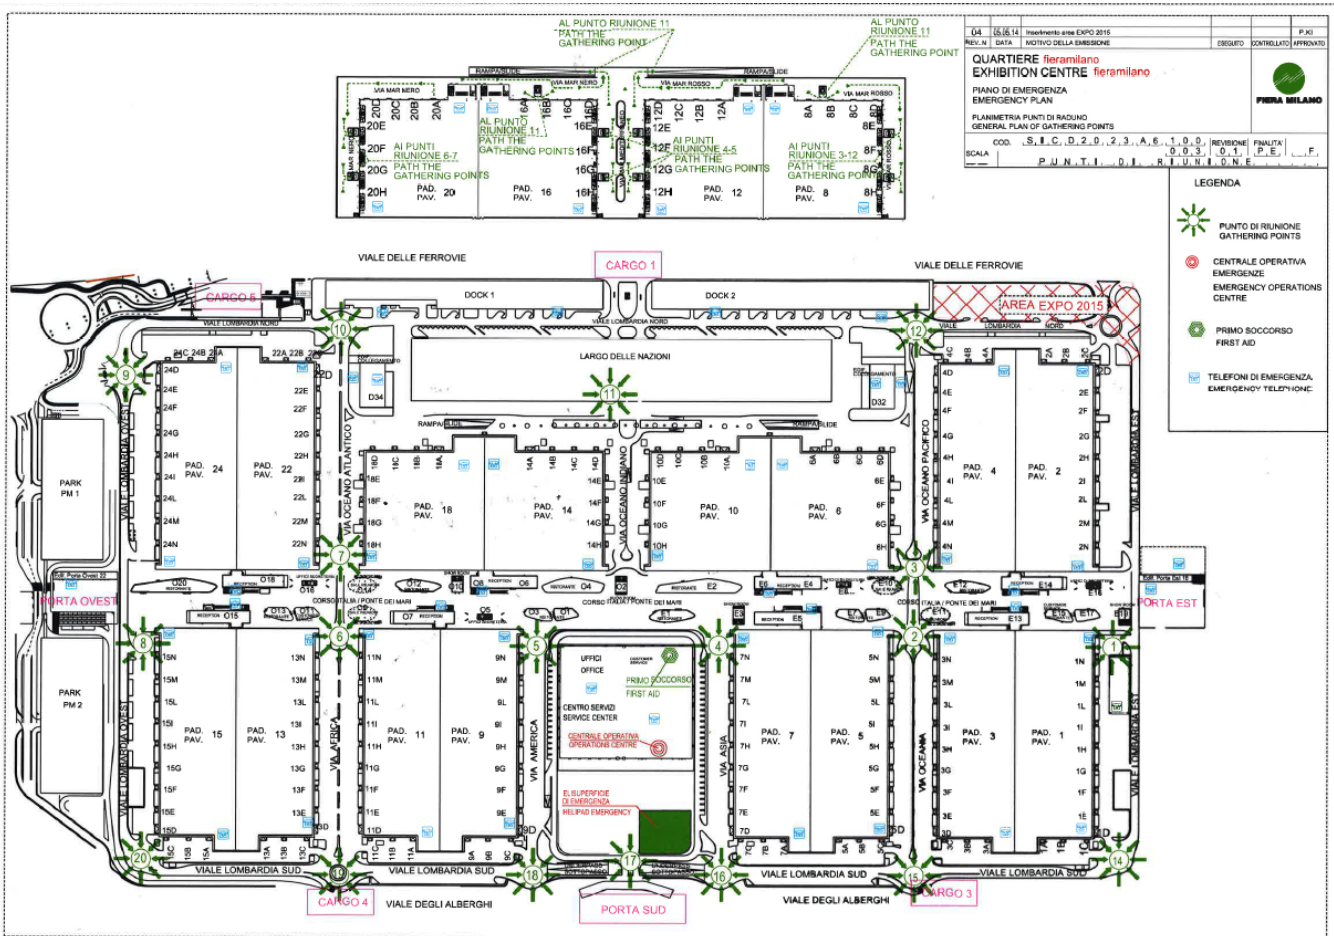

4.3 Active safety services and facilities

The following safety services will be available at the Exhibition Centre during the assembly, exhibition and disassembly phases of the event:

- Operation Centre
- Fire-fighting first aid
- Medical first aid (with defibrillators)
- Fire-fighting

## 5. Description of the event

### 5.1 Type of event

The Exhibition "XYLEXPO COMPOSITES FUTURE" consists of the 29th Worldwide Biennial of Woodworking Technologies and Components for the Furniture Industry.

### 5.2 Date

The event will take place from 9 to 12 June 2026.

### 5.3 Place



The event uses the halls 14-18. It also includes the entrance hall "Centro Servizi Stella Polare, Corso Italia, Ponte dei Mari.

### 5.4 Operating timing

The work for the assembly and disassembly of the event takes place with the following timing:

ACTIVITIES	WORKING PERIOD
Preparation area: general preparation of pavilions and assembly of specific spaces	From 28 May to 1 June 2026
Restoration area	16 June 2026

Official assembly and disassembly for Exhibitors:

		 		June 9 - 12, 2026 halls 14 -18 fieramilano, Rho		
DAYS	OPENING HOURS of the halls		TYPE OF VEHICLES ALLOWED	ENTRANCE GATES		
	from	to				
<b>SETTING UP</b>	Tuesday, June 2	7:30 AM	6:30 PM	all types of vehicles	- PORTA SUD - PORTA EST (pedestrian) - CARGO 1 (GPS: + 45°31'22.67", + 9°4'51.21") - CARGO 5 (GPS: + 45°31'14", + 9°4'33.76") (open until 12:00 PM)	
	Wednesday, June 3	7:30 AM	6:30 PM			
	Thursday, June 4	7:30 AM	6:30 PM			
	Friday, June 5	7:30 AM	6:30 PM			
	Saturday, June 6	7:30 AM	6:30 PM			
	Sunday, June 7	7:30 AM	6:30 PM			
	Monday, June 8	7:30 AM	2:00 PM *			
<p>* PLEASE NOTE, on June 8th:</p> <ul style="list-style-type: none"> <li>- private cars, without the need to unload exhibition goods, cannot reach the pavilions, but they must stop at Largo Nazioni;</li> <li>- <u>only stand dressing, decoration and final touches within the stand will be allowed;</u></li> <li>- the fitter companies must complete all stand-fitting activities strictly <u>by 2 PM</u>, as the remaining time will be used by Fiera Milano for gangway cleaning and laying of the carpet;</li> <li>- only exhibitors will be allowed to stay inside their booth until 6 PM.</li> </ul>						
<b>DISMANTLING</b>	Friday, June 12	6:00 PM	7:30 PM	hand parcels only and Fiera Milano activities **	- PORTA SUD - PORTA EST (pedestrian) - CARGO 1 (GPS: + 45°31'22.67", + 9°4'51.21")	
		7:30 PM	10:00 PM			
	Saturday, June 13	7:30 AM	6:30 PM	all types of vehicles	- PORTA SUD - PORTA EST (pedestrian) - CARGO 1 (GPS: + 45°31'22.67", + 9°4'51.21") - CARGO 5 (GPS: + 45°31'14", + 9°4'33.76") (open until 12:00 PM)	
	Sunday, June 14	7:30 AM	6:30 PM			
	Monday, June 15	7:30 AM	6:30 PM			
<p>** From 7:00 PM the electricity motive power disengage in the booths and the carpet removal are planned.</p>						

Any extensions must be requested directly by the Exhibitors to the Fiera Milano/Customer Service office.

For more details, see the mobilisation circular.

## 6. Information on Environmental Risks in the Exhibition Centre and implemented preventive measures

Environmental Risks Sheet n° 6.1			Areas in exhibition assembly/disassembly
Exposed subjects			Personnel in the areas
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly <input type="checkbox"/> Show <input type="checkbox"/> Other
Area			Indoor and outdoor areas
Hazard	Type of risk	Consequences	Implemented protective measures
Working at height	<ul style="list-style-type: none"> <li>Falling objects and/or equipment, impacts, crushing,</li> </ul>	<ul style="list-style-type: none"> <li>Injuries, including very serious ones</li> </ul>	<ul style="list-style-type: none"> <li>Monitoring signs</li> <li>Fencing of work areas</li> <li>Head protection: helmets</li> <li>Foot protection: anti-perforation - anti-crushing shoes</li> </ul>
Use of equipment for handling and lifting materials (forklifts, mobile cranes, mobile elevating platforms, etc.)	Impacts / crushing, running over	<ul style="list-style-type: none"> <li>Injuries, including very serious ones</li> </ul>	<ul style="list-style-type: none"> <li>Presence of signs installed at the entrances of the halls</li> <li>Follow the standard caution and prudence rules</li> <li>Means at a walking pace</li> <li>Fencing of work areas (mobile elevating platforms, mobile cranes, etc.)</li> </ul>
Assembly/disassembly operations	<ul style="list-style-type: none"> <li>Structural failure</li> </ul>	<ul style="list-style-type: none"> <li>Injuries, including very serious ones</li> </ul>	<ul style="list-style-type: none"> <li>Respect for the restrictions on the use of the halls, with regard to floor load-bearing capacity, door dimensions and height limits</li> <li>Respect of the assembly instructions</li> <li>Certifications of structures</li> </ul>
Presence of working equipment with combustion engine	<ul style="list-style-type: none"> <li>Exhaust gases</li> </ul>	<ul style="list-style-type: none"> <li>Poisoning</li> </ul>	<ul style="list-style-type: none"> <li>Switching off the engines of stationary vehicles</li> <li>Use of pipes to discharge fumes outside</li> <li>Pavilion ventilation</li> </ul>
<ul style="list-style-type: none"> <li>Presence of materials, equipment, waste, etc. on the floor;</li> <li>Possible presence of pits without cover;</li> <li>Presence of irregularities in the floor coverings (torn and/or raised carpet, cellophane, etc.).</li> </ul>	<ul style="list-style-type: none"> <li>Tripping, falling, cuts, bumps.</li> </ul>	<ul style="list-style-type: none"> <li>Serious injuries</li> </ul>	<ul style="list-style-type: none"> <li>Signal open pits and delimit areas</li> <li>Periodic maintenance of floors</li> <li>Cleaning of transit areas/aisles</li> <li>Behave according to the normal caution and prudence rules</li> <li>Keep floor coverings orderly, if any</li> <li>Monitoring signs</li> </ul>
<ul style="list-style-type: none"> <li>Presence of electrical systems;</li> <li>Presence of processing waste</li> </ul>	<ul style="list-style-type: none"> <li>Fire</li> </ul>	<ul style="list-style-type: none"> <li>Burns</li> <li>Poisoning</li> </ul>	<ul style="list-style-type: none"> <li>Prohibition without prior authorization of: <ul style="list-style-type: none"> <li>introduction of flammable liquids and gases</li> <li>hot or open flame processes</li> <li>introduction of heating appliances</li> </ul> </li> <li>No smoking</li> <li>Removal of waste materials from aisles</li> <li>Electrical systems in compliance with standards</li> <li>The materials used for fitting up must be fireproof</li> </ul>
Presence of electrical systems;	<ul style="list-style-type: none"> <li>Electrocution</li> </ul>	<ul style="list-style-type: none"> <li>Serious injuries</li> </ul>	<ul style="list-style-type: none"> <li>Observe the safety signs on the electrical panels and at the points of use</li> <li>Do not work on electrical systems without prior authorisation</li> <li>Periodic maintenance of fixed installations</li> <li>Construction of temporary electrical systems in accordance with the law</li> </ul>

Presence of doors and gates also moved automatically	<ul style="list-style-type: none"> <li>• Generic mechanical risk: crushing, shearing, impact from doors, gates, etc.</li> </ul>	<ul style="list-style-type: none"> <li>• Serious injuries</li> </ul>	<ul style="list-style-type: none"> <li>• Periodic maintenance of windows, doors and gates</li> <li>• Correct use of the locking elements</li> <li>• Monitoring signs</li> </ul>
--	---	--	---

Environmental Risks Sheet n° 6.2			Areas in exhibition assembly/disassembly
Exposed subjects			Personnel in the areas
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly <input checked="" type="checkbox"/> Show <input type="checkbox"/> Other
Area			External transit routes
Hazard	Type of risk	Consequences	Implemented protective measures
Use of vehicles in general, for the transport and handling of people and work equipment (forklifts, mobile cranes, mobile elevating platforms, etc.)	<ul style="list-style-type: none"> <li>• Running over by vehicles, means of transport</li> <li>• Vehicle collision</li> <li>• Collisions/bumps with structures</li> <li>• Possible contacts between work equipment/means used by the various companies</li> </ul>	<ul style="list-style-type: none"> <li>• Injuries, including very serious ones</li> </ul>	<ul style="list-style-type: none"> <li>• Respect for horizontal and vertical signs</li> <li>• Maintain the speed limit of 30 km/h, where necessary adopt a walking pace</li> <li>• Restriction and shifts for vehicles entering the Centre (see Mob./Demob. circular)</li> <li>• Limitation of parking areas</li> <li>• Use of PPE</li> <li>• Respect and application of monitoring signs</li> <li>• Respect of the deadlines indicated in the programme (Gantt) of the works relating to the events</li> <li>• Self-propelled vehicles must proceed absolutely at a walking pace</li> <li>• Prohibition of parking and transit in the manoeuvring areas of the vehicles</li> </ul>
Presence of materials, equipment, etc. on the floor.	<ul style="list-style-type: none"> <li>• Encumbrance of the passage surfaces</li> </ul>	<ul style="list-style-type: none"> <li>• Serious injuries</li> </ul>	<ul style="list-style-type: none"> <li>• Respect for the rules contained in the Highway Code and those established by Fiera Milano SpA contained in the Technical Regulations</li> <li>• Obligation to keep transit areas clear;</li> <li>• Obligation to avoid the disorderly presence of material trying to limit as much as possible the encumbrance, in order to facilitate the transit of persons and means;</li> </ul>

Environmental Risks Sheet n° 6.3			Areas during the exhibition
Exposed subjects			Personnel present in the areas, Visitors
Period concerned			<input type="checkbox"/> Assembly <input type="checkbox"/> Disassembly <input checked="" type="checkbox"/> Show <input type="checkbox"/> Other
Area			Indoor and outdoor areas
Hazard	Type of risk	Consequences	Implemented protective measures
Presence of uncovered pits	• Tripping, falling,	• Serious injuries	<ul style="list-style-type: none"> <li>• Periodic maintenance of floors</li> <li>• Mark open pits and delimit areas</li> <li>• Clean transit routes</li> <li>• Behave according to the normal caution and prudence rules</li> <li>• Keep any floor coverings orderly</li> <li>• Monitoring signs</li> </ul>
Structural failure	• Falling structural elements, objects, crushing, impacts	• Injuries, including very serious ones	<ul style="list-style-type: none"> <li>• Respect for the restrictions on the use of the halls, with regard to floor load-bearing capacity, door dimensions and height limits</li> <li>• Certifications of structures</li> </ul>
Presence of electrical systems; Presence of material on display	• Fire	<ul style="list-style-type: none"> <li>• Burns</li> <li>• Poisoning</li> </ul>	<ul style="list-style-type: none"> <li>• Prohibition without prior authorisation of:               <ul style="list-style-type: none"> <li>- introduction of flammable liquids and gases</li> <li>- hot or open flame processes</li> <li>- introduction of heating appliances</li> </ul> </li> <li>• No smoking</li> <li>• Removal of waste materials from aisles</li> <li>• Electrical installations in accordance with the regulations</li> </ul>
Presence of electrical systems;	• Electrocutation	• Serious injuries	<ul style="list-style-type: none"> <li>• Observe the safety signs on the electrical panels and at the points of use</li> <li>• Do not work on electrical systems without prior authorisation</li> <li>• Periodic maintenance of fixed installations</li> <li>• The systems serving the stands were built and certified according to the Italian Ministerial Decree 37/08</li> </ul>
Presence of vehicles,	• Running over	• Injuries, including very serious ones	<ul style="list-style-type: none"> <li>• Respect of horizontal and vertical signs</li> <li>• Maintain the speed limit of 30 km/h, where necessary adopt a walking pace</li> <li>• Pavillion crossing control</li> </ul>

Environmental Risks Sheet n° 6.4			Outdoor areas not affected by exhibitions
Exposed subjects			Operators, employees
Period concerned			<input type="checkbox"/> Assembly <input type="checkbox"/> Disassembly <input checked="" type="checkbox"/> Show <input checked="" type="checkbox"/> Other
Area			External transit routes
Hazard	Type of risk	Consequences	Implemented protective measures
Presence of vehicles,	<ul style="list-style-type: none"> <li>• Running over by vehicles, means of transport</li> <li>• Collision of vehicles means of transport</li> <li>• Possible contacts between work equipment/means used by different companies</li> </ul>	<ul style="list-style-type: none"> <li>• Serious injuries</li> </ul>	<ul style="list-style-type: none"> <li>• Respect of horizontal and vertical signs</li> <li>• Maintain the speed limit of 30 km/h, where necessary adopt a walking pace</li> <li>• Restriction on access to vehicles in the Centre</li> <li>• Prohibition for pedestrians from walking on the roadway</li> <li>• Use of PPE</li> <li>• Respect for and application of monitoring signs</li> <li>• Respect of the deadlines indicated in the programme (Gantt) of the works relating to the events</li> <li>• Self-propelled vehicles must proceed at a walking pace</li> <li>• Prohibition of parking and transit in vehicle manoeuvring areas</li> <li>• Compliance with the rules contained in the Highway Code and those established by Fiera Milano SpA contained in the Technical Regulations</li> <li>• Obligation to keep transit areas clear;</li> <li>• Obligation to avoid the disorderly presence of material trying to limit as much as possible the encumbrance, in order to facilitate the transit of persons and means;</li> </ul>
Presence of waste materials on the floor	<ul style="list-style-type: none"> <li>• Fall, tripping</li> </ul>	<ul style="list-style-type: none"> <li>• Serious injuries</li> </ul>	

The following tables describe how to assess interference risks by Contractors.

**Table 1 - Assessment of the predictability of the frequency of occurrence**

Through this table it is possible to attribute to each identified hazard factor a "judgement" of temporal predictability supported by logical criteria, formalised on the company's internal historical series, on the national statistics of accidents by sector and globally and on the predictability of the occurrence of the hazard in question, possibly already described in the specific literature.

	PREDICTABILITY OF THE FREQUENCY	DEFINITIONS / CRITERIA
4	HIGH	<ul style="list-style-type: none"> <li>• A direct correlation between the detectable criticality and the harmful consequences for the worker can be demonstrated. Rebuilding the cause-and-effect link is immediate.</li> <li>• The risk is present during most of the operators' working time and/or simultaneously involves a significant number of operators.</li> <li>• There is extensive literature on this type of risk.</li> <li>• There are repeated and/or already recorded accidents in this company or in similar companies.</li> </ul>
3	MEDIUM	<ul style="list-style-type: none"> <li>• Rebuilding the causal chain between potential damage agents and actual consequences on operators is possible, yet not immediate.</li> <li>• The risk is present for limited periods of the exposure time of the operators or involves the exposure time of a significantly limited part of them.</li> <li>• There are individual sources of literature on this type of risk.</li> <li>• There are various accidents and internal company experiences, not identical but only similar, and/or similar experiences in the sector are described.</li> </ul>
2	LOW	<ul style="list-style-type: none"> <li>• Rebuilding the causal chain is possible, but it is made up of several accidental events linked individually, which are unpredictable.</li> <li>• The risk is present but can only be randomly superimposed on the exposure time of the exposed workers.</li> <li>• There have been no accidents of this type in the company, or at most rare cases that can be assimilated after the event in question can be described. Only a few similar cases have been reported in this sector.</li> </ul>
1	VERY LOW	<ul style="list-style-type: none"> <li>• Rebuilding the causal chain is possible only afterwards and simulations of potential damage would not be operationally sustainable and consistent with the company's business. It is practically impossible to analyse the cause-and-effect link.</li> <li>• The risk is completely random and not easily linked to the working exposure time of the operators.</li> <li>• There have never been any such cases at the company. In the same sector of activity, only very rare comparable and not statistically correlated events have occurred.</li> </ul>

**Table 2 - Assessment of biological magnitude**

Biological magnitude is the assessment of the maximum predictable severity of potential biological damage. A table has also been created, beforehand, to identify possible levels of damage, where the biological magnitude expresses the physical and biological extent of the damage, the severity and duration of its prognosis and the subsequent percentage of residual disability that the unwanted event could cause on potentially present operators.

	BIOLOGICAL MAGNITUDE	DEFINITIONS / CRITERIA
4	VERY SEVERE	<ul style="list-style-type: none"> <li>• Accident or acute exposure event with lethal and/or totally disabling effects.</li> <li>• Chronic exposure with lethal and/or totally disabling effects.</li> <li>• Involvement of large portions of the body and/or individual vital parts.</li> </ul>
3	SEVERE	<ul style="list-style-type: none"> <li>• Accident or acute exposure event with partially disabling effects.</li> <li>• Chronic exposure with irreversible and/or partially disabling effects.</li> <li>• Involvement of significant vital body parts and/or non-vital impairment of individual parts.</li> </ul>
2	MEDIUM	<ul style="list-style-type: none"> <li>• Accident or acute exposure event with reversible disability.</li> <li>• Chronic exposure with reversible effects.</li> </ul>
1	MINOR	<ul style="list-style-type: none"> <li>• Accident or acute exposure event with rapidly reversible disability.</li> <li>• Chronic exposure with rapidly reversible effects.</li> </ul>

As in the table relating to the predictability of the frequency of occurrence, for each level of damage a "judgement" can be obtained which refers to accident statistics, the health competence of experts and the epidemiological, medical and forensic literature.

**Table 3 - Estimated risk assessment procedure**

For each accidental risk identified during the preliminary phase, the estimated risk analysis was carried out, correlating the "judgements" of the predictability of the biological frequency and magnitude. The assessment took into account that the estimated risk is a function of the two parameters.

	ESTIMATED RISK	DEFINITIONS / CRITERIA
> 12	HIGH	<ul style="list-style-type: none"> <li>• Extensive or very extensive risks, resulting in serious or very serious damage.</li> <li>• Medium extensive risks, resulting in very serious damage.</li> <li>• Very extensive risks, resulting in medium damage.</li> </ul>
12 8	MEDIUM HIGH	<ul style="list-style-type: none"> <li>• Presence of medium to very extensive risks, resulting in minor to serious damage.</li> <li>• Presence of small to medium extensive risks, resulting in medium to very serious damage.</li> </ul>
7 4	MEDIUM	<ul style="list-style-type: none"> <li>• Presence of very small extensive risks, resulting in serious or very serious damage.</li> <li>• Presence of extensive or very extensive risks, resulting in very little damage.</li> <li>• Presence of small extensive risks, resulting in little damage.</li> </ul>
3 2	LOW	<ul style="list-style-type: none"> <li>• Presence of very small extensive risks, resulting in little or medium damage.</li> <li>• Presence of low to medium extensive risks, resulting in very little damage.</li> </ul>
1	VERY LOW	<ul style="list-style-type: none"> <li>• Presence of very small extensive risks, resulting in very little damage.</li> <li>• Probabilistic absence of risk.</li> </ul>

**Table 4 - Calculation of the correction factor for the risk level: the control levels**

The control is the action on the event and on the context that decreases the area of risk, increases the predictability of a hazard and/or neutralizes the harmful effects of an accident. The presence of a risk control means that, at a cognitive, technical and operational level, the specific risk that cannot be eliminated from a technical and/or business point of view is kept under control by means of special measures (procedures, training, information, special collective protection devices, control and alarm systems).

V LPR	CONTROL LEVEL	DEFINITIONS / CRITERIA
4	HIGH	<p><b>Risk with excellent / high control:</b></p> <ul style="list-style-type: none"> <li>• well measured and calculated risk;</li> <li>• undetectable danger;</li> <li>• frequency and magnitude both low or absent;</li> <li>• optimal control measures fully taken.</li> </ul>
3	MEDIUM	<p><b>Risk with sufficient / medium control:</b></p> <ul style="list-style-type: none"> <li>• risk measured and calculated only partially;</li> <li>• easily detectable danger;</li> <li>• frequency and magnitude both low or medium for both variables;</li> <li>• existing but not fully adopted control measures.</li> </ul>
2	LOW	<p><b>Risk with mediocre / low control:</b></p> <ul style="list-style-type: none"> <li>• risk not or not fully measured and calculated;</li> <li>• present danger difficult to identify and describe;</li> <li>• medium or relevant frequency or magnitude both individually and for both variables;</li> <li>• insufficient control measures.</li> </ul>
1	INSUFFICIENT OR MISSING	<p><b>Risk insufficiently controlled:</b></p> <ul style="list-style-type: none"> <li>• risk not measured and calculated;</li> <li>• present danger but not identified or described;</li> <li>• medium or significant frequency and magnitude individually or for both variables;</li> <li>• inconsistent or absent control measures.</li> </ul>

**Table 5 - Final assessment of the managed risk**

Finally, the value of the managed risk is obtained by assessing the effectiveness of the level of control in relation to the estimated risk.

	MANAGED RISK	DEFINITIONS	ACTIONS
1 3	<b>LOW</b> More than controlled or not imposing control.	Presence of non-significant, low or medium risks, excellently or sufficiently controlled.	<b>No action:</b> no need for improvement actions.
4 7	<b>MEDIUM</b> Fairly, sufficiently controlled and/or easily controlled.	Presence of low, high, fairly/insufficiently controlled risks.	<b>No intervention, but temporarily monitoring:</b> no improvement action is needed if the results of subsequent in-depth evaluations are positive. <b>Recommended interventions and permanent monitoring:</b> non-urgent improvement actions with long-term planning can be implemented.
8 11	<b>HIGH</b> Fairly controlled and/or difficult to control.	Presence of medium, high and very high risks, fairly controlled or not controlled.	<b>Interventions to be implemented and permanent monitoring:</b> clear but not complex corrective actions to be planned in the medium term are necessary. <b>Mandatory interventions and permanent monitoring:</b> corrective actions to be planned with short urgency are necessary.
12	<b>VERY HIGH</b> Poorly or not controlled and/or controllable.	Presence of high and very high risks, insufficiently controlled or not controlled.	<b>Immediate interventions, permanent monitoring, urgency and emergency:</b> immediate corrective and demanding actions are necessary and cannot be delayed.

## 7. Information on risks specific to processes and risk assessment

### 7.1 Criteria for drafting the document

The methodology used for the assessment of interference risks consists of some distinct phases:

- a) the collection of information on specific risks regarding the activities of each contractor that may cause interference risks, with the consequent development of the relative Sheet;
- b) the overall analysis of the interference risks based on the information obtained before;
- c) the estimate of the interference risks related to the activities of each contractor;
- d) the indication of the prevention measures adopted by the contractors to counter the interference risks;
- e) the indication of the prevention and protection measures required by the Customer to remove the interference risks. The prevention and protection measures are listed inside the table n° 7.1 and are issued at all the activities of each contractor.

**Table n° 7.1 – Prevention measures to remove the interference risks**

- *respect the timing indicated inside the Work Schedule;*
- *require the access authorization to the stand at the RSE of the stand;*
- *verify that the appointed Safety Officers are supervising and monitoring both the correct application of the rules on safety and the provisions contained in this document;*
- *verify that the appointed Safety Officers are complying with their obligation to check the correct safety condition of the ongoing activities and of the working environment, prior to authorize the entry of the workers to the exhibition spaces (working areas);*
- *verify that the appointed Safety Officers are complying with their obligation to keep the transit areas free from obstacles and, when not possible, to prevent a disorderly presence of materials (always in minimal quantities) by limiting the footprint, in order to facilitate the transit;*
- *verify that the appointed Safety Officers, during work at a height, are complying with their obligation to deny the access to the area below and to indicate the danger;*
- *verify that the appointed Safety Officers are checking that the workers will remain distant from suspended loads;*
- *verify that the appointed Safety Officers are complying with their obligation to check than the workers, who removed the cover, had signaled the presence of open pits. It is emphasised the specific obligation to completely close the pits, after the use;*
- *verify that the appointed Safety Officers are complying with their obligation to check than the workers are adopting the utmost caution while moving near open pits;*
- *verify that the appointed Safety Officers are complying with their obligation to check than the workers who drives self-propelled vehicles must proceed absolutely at a walking pace;*
- *verify that the appointed Safety Officers are complying with their obligation to check than no workers will be standing inside or will transit through the vehicle maneuvering areas;*
- *verify that the appointed Safety Officers are complying with their obligation to check than the workers are adopting the common prudential rules while moving and working;*
- *verify that the appointed Safety Officers are complying with their obligation to check than the workers are using proper PPE and are respecting the monitoring signs;*
- *verify that the appointed Safety Officers are complying with their obligation to check than the workers are respecting the provisions and the rules contained in the Technical Regulations of Fiera Milano.*

## 7.2 List of activities carried out by the Manager's Contractors

The following is a non-exhaustive list of the contractors works in the areas affected by the event:

Contractor Activity	Reference worksheet
Ground marking of the exhibition area	Annex 2.1
Installation of hanging points and fitting of hung structures	Annex 2.2
Carpet laying and removal	Annex 2.3
Construction, connection and activation of the systems for the event	Annex 2.4
Assembly and disassembly of stands and structures in the exhibition area	Annex 2.5
Cleaning of the areas affected by the event	Annex 2.6
Delivery and collection of furniture, accessories, special equipment and heavy handling	Annex 2.7
Delivery and collection of packaging	Annex 2.8
Fire extinguisher control and rental service to Exhibitors	Annex 2.9
Collection hazardous and non-hazardous waste	Annex 2.10
Food and beverage services, catering and trading activities	Annex 2.11
Control, check, porter and reception services	Annex 2.12
Installation and removal of signposting	Annex 2.13
Inspection activities	Annex 2.14

The worksheets containing information on the specific risks inherent in the activities of each contractor that may generate interference, in addition to the prevention measures to be taken, are available in **Annex 2** of this D.U.V.R.I.

## 8. Safety costs

The safety costs are one of the most important elements for the protection of the Client in the event of an accident involving a worker of a contracted company and failure to indicate implies the nullity of the contract.

The definition of the costs must be: "congruous, analytical for single items, fixed or measured (therefore not by percentage), referring to standard or specialized price lists, or based on price lists or official price lists in force in the area concerned, or on the price list of the customer's security measures". In particular, "the individual items of safety costs must be calculated considering their cost of use for the supply or service concerned which includes, when applicable, installation and subsequent disassembly, any maintenance and depreciation".

### 8.1 Safety costs to eliminate or reduce interference

The cost, not subject to reduction, that the Contractor must bear to implement specific safety measures to prevent risks of purely interference nature, quantified on the basis of the analysis of potential interference, are listed in the table below and cover (non-exhaustive list):

Work phases	Prevention measures to be taken
Interfering phases	<ul style="list-style-type: none"> <li>▪ Delimitation of work areas;</li> <li>▪ Removal of materials and equipment not relevant to ongoing activities from the work site;</li> <li>▪ Redesign of escape routes and safety exits, if modified due to work requirements;</li> <li>▪ Installation of appropriate temporary signage;</li> <li>▪ Continuous assistance during work execution;</li> <li>▪ Use of specific PPE (e.g., gloves, helmet, safety shoes, ear protectors).</li> </ul>

The amount of security costs for interference risks amounts to **€ 426,16**. In detail:

Description	U.M.	Q.ty	Unit price	Price for each pavilion	Pavilions used	Total price
Coordination meetings	hours	1	46,76 €	46,76 €	2	93,52 €
Safety signs, signage and related adjustments	n°	4	9,89 €	39,56 €	2	79,12 €
Delimitation of work areas with white / red tape and/or plastic columns including a fillable base and white/red chain	m	20	4 €	80 €	2	160 €
Verification inspections	hours	1	46,76 €	46,76 €	2	93,52 €

### 8.2 Safety costs related to the Contractor's business operations

The costs incurred by the contractor to implement safety measures related to the exercise of their own activity, specifically indicated in the offer, are borne by the contractor themselves.

## 9. Annexes

### 9.1 Safety documents present on Fiera Milano internet portal

On the Fiera Milano website [www.fieramilano.it](http://www.fieramilano.it) there is a section dedicated to the event in which documents useful for safety purposes are made available to Exhibitors. The documents can be consulted and downloaded from the dedicated link, in the "Exhibitors / Technical documents" section <https://exhibitors.fieramilano.it/>.

The documents available and attached are:

- Information report of the Centre Emergency Plan
- Centre description booklet for safety purposes
- Plan of meeting points
- Circular of the provisions for the transit and unloading of vehicles in the Centre
- Evacuation plans for the halls used by the event
- Sheets with the technical characteristics of the pavilions used by the event
- Fiera Milano Technical Regulations
- Regulations for the assembly of raised platforms first floor
- Circular of mobilisation for the access of people and vehicles to the event
- Protocol for combating undeclared work
- Protocol workplace safety
- Disposal for fitting up (DM 22-7\_2014)
- Guidelines DUVRI model
- Fac simile DUVRI model
- Declaration of correct fit up
- Declaration of correct fitting up of reaction to fire classified materials
- Waste collection areas for the event
- Rules for separate waste collection Rho

For those who carry out work in the period dedicated to the preparation and/or restoration of the areas (early assembly or later dismantling, compared to the official dates), in addition to the above documentation, is available the D.U.V.R.I. of the Contractors of Fiera Milano, which regulates interferential activities during these phases.

### 9.2 Safety documents present on Organizer internet site

The Organizer makes this D.U.V.R.I. "updated" on the event website [www.xylexpo.com](http://www.xylexpo.com).

### 9.3 D.U.V.R.I. annexes

**Annex 1** contains:

- List of contractors and self-employed workers appointed by Fiera Milano, with the work schedule.

**Annex 2** contains:

- Worksheets containing information on the specific risks inherent in the activities of each contractor that may generate interference, in addition to the prevention measures to be taken.



**FIERA MILANO**

# UPDATED SURVEY

## D.U.V.R.I.

Unified Document for the Assessment of Interference Risks among concomitant activities carried out in the same work environment  
(pursuant to the provisions of Art. 26 of Italian Leg. Decree 81/2008 and amendments)

---

## ANNEXED 1

List of contractors and self-employed workers appointed by the Organiser and Fiera Milano, with the work schedule



FIERA MILANO

Elenco Appaltatori e cronoprogramma dei lavori Fiera Milano S.p.A.  
- List of contractors and work schedule Fiera Milano Spa

ALL.1\_rev.03\_2026

Manifestazione / Show: XYLEXPO COMPOSITES FUTURE 2026

RESPONSABILE APPALTATORE - CONTRACTOR MANAGER

Preposto Fiera Milano Fiera Milano Officer	Descrizione attività Appaltatore - Activity description Contractor	Scheda Lavorazione di riferimento - Reference Work sheet	Appaltatore - Contractor	Sub Appaltatore - Sub contractor	Nominativo - Name	Telefono - Phone	Mail	Area interessata dai lavori - Area affected by the works	MONTAGGIO Setting up								ESPOSIZIONE Show DAL 9 AL 12/06	SMONTAGGIO Dismantling			
									MONTAGGIO UFFICIALE ESPOSITORI Official Exhibitors Setting up									SMONTAGGIO UFFICIALE ESPOSITORI Official Exhibitors Dismantling			
									02-giu	03-giu	04-giu	05-giu	06-giu	07-giu	08-giu	12-giu	13-giu	14-giu	15-giu		
SALZANI	Realizzazione, allacciamento e attivazione impianti elettrici Construction, connection, activation of electrical systems	Allegato 2.4	TECHNE SPA	SAN GIORGIO SPA CARMA2018 SRL	STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Collaudo impianti elettrici Testing electrical system	Allegato 2.12	IB PROJECT SRL		MICHELE VITAGLIANO	329-6328698	<a href="mailto:collaudi@ibproject.it">collaudi@ibproject.it</a> <a href="mailto:mvitagliano@ibproject.it">mvitagliano@ibproject.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X				
SALZANI ROBECCHI	Assistenza impianti idrici, Aria compressa, impianti idrici Antincendio Water system assistance, compressed air, fire-fighting water system	Allegato 2.4	TECHNE SPA	LENTINI GIUSEPPE	STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
COCCHETTO	Assistenza Ascensori / Tappeti mobili Lift / moving walkways assistance	Allegato 2.4	SCHINDLER SPA	LABOR RL	MATTEO LOZZA	344-1629192	<a href="mailto:Matteo.Lozza@schindler.com">Matteo.Lozza@schindler.com</a> <a href="mailto:Alessandro.Muti@schindler.com">Alessandro.Muti@schindler.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Assistenza Impianti TVCC Control TV system assistance	Allegato 2.4	TECHNE SPA	OVERNET	STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Assistenza Impianti diffusione sonora Sound diffusion system assistance	Allegato 2.4	TECHNE SPA	PHOEBUS SPA	STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Assistenza Impianti rilevazione Fumi e superv. Smoke detection system assistance	Allegato 2.4	TECHNE SPA	SIEMENS	STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Ripristino pozzetti canarole nei padiglioni Restoration of wheels in the pavilions	Allegato 2.7	TECHNE SPA		STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Assistenza da fabbro Assistance for blacksmith works	Allegato 2.7	TECHNE SPA		STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Protezione delle cabine Ascensori Protection cabins lift	Allegato 2.7	TECHNE SPA		STEFANO MANTOVANI	340-8987392	<a href="mailto:stefano.mantovani@technemobi.com">stefano.mantovani@technemobi.com</a> <a href="mailto:maurizio.belotti@technemobi.com">maurizio.belotti@technemobi.com</a> <a href="mailto:katia.vecchi@technemobi.com">katia.vecchi@technemobi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Posa e rimozione arredi Laying and removal furniture	Allegato 2.7	SILMA SRL		ROBERTO DE LEO	347-0476077	<a href="mailto:r.deleo@consorziosilma.it">r.deleo@consorziosilma.it</a> <a href="mailto:fiara@silma-srl.eu">fiara@silma-srl.eu</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
Rifacimento Impianti TVCC Control TV system renovation	Allegato 2.4	OVERNET S.r.l. JOHNSON CONTROLS SPA		ANDREA LUIGI BONAZZA SAVERIO TROVATO		<a href="mailto:info@overnetitalia.it">info@overnetitalia.it</a> <a href="mailto:sales@tycoint.com">sales@tycoint.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X		
MARTIGNONI	Noleggio e rimozione impianti audio e video Rental and removal audio/video system	Allegato 2.4	STS COMMUNICATION SRL	AMS COOP BENOW COOP DOC SERVIZI SOC COOP HB ONE SRLS SKELDON SOC COOP WLS SRL	LUCA TORTORELLA	335-6314222	<a href="mailto:direzioneoperation@stsccommunication.it">direzioneoperation@stsccommunication.it</a> <a href="mailto:sicurezza@stsccommunication.it">sicurezza@stsccommunication.it</a> <a href="mailto:stefano.valsecchi@gmail.com">stefano.valsecchi@gmail.com</a> <a href="mailto:vincenzo.monti@stsccommunication.it">vincenzo.monti@stsccommunication.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
SEPIELLI (Appendimenti)	Appendimenti strutture tipo "americane", illuminotecnica e impianto elettrico a terra. Hanging structures like "americane", technical lighting services and electrical systems		HOLLYWOOD SRL	B CONSTRUCT SRL HB ONE SRLS MARO. SERVIZI GROUP SRL PRISMATECK SRL	GIANLUCA MAIERA	335-5793278	<a href="mailto:tecnico@hollywood-service.com">tecnico@hollywood-service.com</a> <a href="mailto:andrea@studiotecnicoresolin.com">andrea@studiotecnicoresolin.com</a>	Pad 2 - 4 - 8 - 14 - 18	X	X	X	X	X	X	X	X	X	X	X	X	
			NOVELTY SRL	DOC. SERVIZI SOC COOP PRISMATECK SRL SKELDON SOC.COOP WLS SRL TECHINA SRL	SARA BELLONI	347-2281015	<a href="mailto:sc@sordilaudiport.it">sc@sordilaudiport.it</a> <a href="mailto:sbelloni@novelty-italy.com">sbelloni@novelty-italy.com</a> <a href="mailto:ebionni@novelty-italy.com">ebionni@novelty-italy.com</a> <a href="mailto:abelloni@novelty-italy.com">abelloni@novelty-italy.com</a>	Pad 5 - 6 - 7 - 10 - 12 Centro Servizi	X	X	X	X	X	X	X	X	X	X	X	X	
			AGORA SPA	INSIEME SOC.COOP SKELDON SOC.COOP WLS SRL BRUNELLO SRL	ALBERTO MARIANI	334-6065091 335-494426	<a href="mailto:sicurezza@agora.aq.it">sicurezza@agora.aq.it</a> <a href="mailto:emilia.cattzone@agora.aq.it">emilia.cattzone@agora.aq.it</a>	Pad 1 - 3 - 9 - 11 - 13 - 15	X	X	X	X	X	X	X	X	X	X	X	X	
			DHS EVENT SOLUTION SRL	DOC. SERVIZI SOC COOP HB ONE SRLS PRISMATECK SRL SKELDON SOC.COOP WLS SRL	MASSIMO BARBERA	393-3362316	<a href="mailto:massimo.barbera@dhs-eventsolution.com">massimo.barbera@dhs-eventsolution.com</a> <a href="mailto:sicurezza@dhs-eventsolution.com">sicurezza@dhs-eventsolution.com</a> <a href="mailto:giovanna.anastasi@dhs-eventsolution.com">giovanna.anastasi@dhs-eventsolution.com</a> <a href="mailto:benedetta.buratto@dhs-eventsolution.com">benedetta.buratto@dhs-eventsolution.com</a>		Pad 16 - 20 - 22 - 24	X	X	X	X	X	X	X	X	X	X	X	X







Elenco Appaltatori e cronoprogramma dei lavori **Fiera Milano S.p.A.**  
 - List of contractors and work schedule **Fiera Milano Spa**

ALL.1\_rev.03\_2026

Manifestazione / Show: XYLEXPO COMPOSITES FUTURE 2026

Preposto Fiera Milano <i>Fiera Milano Officer</i>	Descrizione attività Appaltatore - <i>Activity description Contractor</i>	Scheda Lavorazione di riferimento - <i>Reference Work sheet</i>	Appaltatore - <i>Contractor</i>	Sub Appaltatore - <i>Sub contractor</i>	RESPONSABILE APPALTATORE - <i>CONTRACTOR MANAGER</i>			Area interessata dai lavori - <i>Area affected by the works</i>	MONTAGGIO <i>Setting up</i>								ESPOSIZIONE <i>Show</i>	SMONTAGGIO <i>Dismantling</i>					
					Nominativo - <i>Name</i>	Telefono - <i>Phone</i>	Mail		MONTAGGIO UFFICIALE ESPOSITORI <i>Official Exhibitors Setting up</i>									SMONTAGGIO UFFICIALE ESPOSITORI <i>Official Exhibitors Dismantling</i>					
								02-giu	03-giu	04-giu	05-giu	06-giu	07-giu	08-giu	DAL 9 AL 12/06	12-giu	13-giu	14-giu	15-giu				
	Posa e rimozione lastre in vetro <i>Laying and removal glass panels</i>	Allegato 2.5		ERREPIFER SRL VETRERIA BALLARINI SAS				TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X			
	Falegnameria custom <i>Joinery custom</i>	Allegato 2.5		FM SCENOGRAFIE SRL G&G DI GENNARI SRL CONSORZIO GROUP SERVICE LCM SRL NORD COMPENSATI SRL				TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
	Attrezzature per alimentari <i>Food equipment rental</i>	Allegato 2.4		ZORZI SRL				TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Supervisione e coordinamento sicurezza <i>Health and safety department</i>	Allegato 2.14		STUDIO TECNICO PRIOLISI				TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Consegna e ritiro materiali <i>Delivery and collection of materials</i>	Allegato 2.7		TRASGO SRL				TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
AMOROSO  SONCINI (Reception)	Movimentazione e noleggio PC/stampanti <i>Pc/printer handling and rental</i>	Allegato 2.4	EXPOTRANS SPA	ANTELLI SRL MA. NI. MA. SRL CASELLA AUTOGRU SRL ARIENTI AUTOGRU SRL AUTOTRASPORTI PORRO SRL EVENT LOGISTICS TEAM SRL GLOBUSLOG SOC.COOP VENETO SERVICE A RL MASTERS ART SOC COOP AUTOTRASPORTI CLAVELLI FRANCESCO URANO SOC COOP	LUCA MAZZETTO	335-302085	<a href="mailto:luca.mazzetto@expotrans.net">luca.mazzetto@expotrans.net</a> <a href="mailto:logistica.onsite@expotrans.net">logistica.onsite@expotrans.net</a> <a href="mailto:roberto.moi@expotrans.net">roberto.moi@expotrans.net</a> <a href="mailto:tavacca.nicola@ingegneriaesicurezza.it">tavacca.nicola@ingegneriaesicurezza.it</a> <a href="mailto:bergonzani.paolo@ingegneriaesicurezza.it">bergonzani.paolo@ingegneriaesicurezza.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X			
	Movimentazione e assistenza attrezzature reception <i>Handling and assistance reception equipment</i>	Allegato 2.4	VIVATICKET SPA	ROTA DARIO	ANTONIO DI LASCIO	02-49976060	<a href="mailto:antonio.dilascio@vivaticket.com">antonio.dilascio@vivaticket.com</a> <a href="mailto:safety@vivaticket.com">safety@vivaticket.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X			
	Piattaforma Digitale per creare networking tra Espositori e Visitatori <i>Digital platform to create networking between exhibitors and visitors</i>	Allegato 2.4	LETZFAIR SRL		CLAUDIO STEFANINI		348-6460045	<a href="mailto:cclaudio.stefanini@letzfair.com">cclaudio.stefanini@letzfair.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X		
	Installazione e assistenza apparecchiature e posa cavi TLC <i>Equipment and cable TLC installation and assistance</i>	Allegato 2.4	TELECOM ITALIA SPA	SOLETO SPA	MARCO RAMORINI		02-36620000	<a href="mailto:timfiera@telecomitalia.it">timfiera@telecomitalia.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X		
	Noleggio piante e fiori <i>Flowers and plants rental</i>	Allegato 2.7	HW STYLE SRL	MEDMEDIA.SOC COOP	MATILDE SALA	035-4879405	<a href="mailto:m.sala@hw-style.it">m.sala@hw-style.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X			
	Noleggio caserforti <i>Safe rental</i>	Allegato 2.7	TRANS SECURITY SERVICE SNC	F.LLI FIORE SRL	MARINA FIORE	045-7650224	<a href="mailto:marina.fiore@transsecurity.it">marina.fiore@transsecurity.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X			
	Noleggio Arredi <i>Rental furniture</i>	Allegato 2.7	NOLOSTAND SPA	GIUSEPPE PRIOLISI	393-9167140	<a href="mailto:rdelegatonolostand@studiodipriolisi.com">rdelegatonolostand@studiodipriolisi.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X			
			RICCI MILANO SRL	ANGELO RICCI	348-0830311	<a href="mailto:info@riccimilano.it">info@riccimilano.it</a>																	
ITALVETRINE SRL			MARIA FORMENTI	03-62230442	<a href="mailto:maria.formenti@italvetrine.it">maria.formenti@italvetrine.it</a>																		
LVA VETRINE	MILETO FARAGUNA	02-5760-4132	<a href="mailto:info@nolovetrine.com">info@nolovetrine.com</a>																				



Elenco Appaltatori e cronoprogramma dei lavori **Fiera Milano S.p.A.**  
 - List of contractors and work schedule **Fiera Milano Spa**

ALL.1\_rev.03\_2026

Manifestazione / Show: XYLEXPO COMPOSITES FUTURE 2026

Preposto Fiera Milano Fiera Milano Officer	Descrizione attività Appaltatore - Activity description Contractor	Scheda Lavorazione di riferimento - Reference Work sheet	Appaltatore - Contractor	Sub Appaltatore - Sub contractor	RESPONSABILE APPALTATORE - CONTRACTOR MANAGER			Area interessata dai lavori - Area affected by the works	MONTAGGIO Setting up								ESPOSIZIONE Show	SMONTAGGIO Dismantling				
					Nominativo - Name	Telefono - Phone	Mail		MONTAGGIO UFFICIALE ESPOSITORI Official Exhibitors Setting up									SMONTAGGIO UFFICIALE ESPOSITORI Official Exhibitors Dismantling				
									02-giu	03-giu	04-giu	05-giu	06-giu	07-giu	08-giu	DAL 9 AL 12/06	12-giu	13-giu	14-giu	15-giu		
ALBERICO	Noleggio impianti audio e video Audio/video system rental	Allegato 2.4	STS COMMUNICATION SRL		LUCA TORTORELLA	335-6314222	<a href="mailto:direzioneoperation@stscommunication.it">direzioneoperation@stscommunication.it</a> <a href="mailto:sicurezza@stscommunication.it">sicurezza@stscommunication.it</a> <a href="mailto:stefano.valsecchi@gmail.com">stefano.valsecchi@gmail.com</a> <a href="mailto:vincepzo.monfi@stscommunication.it">vincepzo.monfi@stscommunication.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Posa moquette Laying carpet	Allegato 2.3	MONTECOLINO SPA	MRD SERVICE S.R.L. FREE SERVICE S.R.L. ERRESSE CARPETS S.A.S. ALLTEX S.R.L. ABC ALLESTIMENTI SOCIETA' COOPERATIVA DRAGOS ALLESTIMENTI S.R.L. CONSORZIO MAIN GROUP F.G.C. SOCIETA' COOPERATIVA FALCO S.R.L. FIDENTE S.P.A. AMI SERVICE S.R.L.	ALESSIA LECCHI	030-983361	<a href="mailto:alessia.lecchi@montecolino.it">alessia.lecchi@montecolino.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Certificazioni e collaudi strutture Certifications and testing structures	Allegato 2.12	GAE ENGINEERING SRL		CHIARA AMARO	011-0566426 int3	<a href="mailto:FieraMilano@gae-engineering.com">FieraMilano@gae-engineering.com</a> <a href="mailto:chiara.amaro@gae-engineering.com">chiara.amaro@gae-engineering.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X				
	Servizi Fotografici e video Photo and video services	Allegato 2.14	FOTOGRAMMA SRL		DOMENICO PIZZARELLI	393-8918311	<a href="mailto:d.pizzarelli@agenziafotogramma.it">d.pizzarelli@agenziafotogramma.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X				
	Attrezzature per alimentari Food equipment rental	Allegato 2.4	ZORZI SRL	COOP F.E.M.A. A.R.L. ALMAM MARCO CORRADO	ILARIA BENVENUTI	045-956917	<a href="mailto:ilaria.benvenuti@zorzi.co">ilaria.benvenuti@zorzi.co</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	Servizi reception e accoglienza Reception services	Allegato 2.12	VIVAEVENTS SRL		FRANCESCA FONDA	391-7218509	<a href="mailto:francesca.fonda@vivaevents.it">francesca.fonda@vivaevents.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X				
			COOP F.E.M.A. A.R.L.		SARA CAVALLOTTI	333-3783144	<a href="mailto:sara.cavallotti@coopfema.it">sara.cavallotti@coopfema.it</a>		X	X	X	X	X	X	X	X						
MASTROTOTARO	Posa Grafica Graphical laying	Allegato 2.5	MATERIA SRL		JACOPO ROSSI	338-666 8399	<a href="mailto:jacopo.rossi@materia.it">jacopo.rossi@materia.it</a> <a href="mailto:sicurezza@materia.it">sicurezza@materia.it</a> <a href="mailto:ingpip@studioingsafati.com">ingpip@studioingsafati.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X
			GRUPPO ITALTELO SPA	MAIN GROUP PUBILFERRO	STEFANO CAVALLETTI	346-948 5918	<a href="mailto:stefano.cavalletto@gruppoitaltelo.it">stefano.cavalletto@gruppoitaltelo.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X
			CONSORZIO MAIN GROUP	EVENT DATA SRL OMEGA ENTERPRISE SRL ALLSTANDS SRLS	CARMELO PARRINELLO	393-475 9430	<a href="mailto:direzione@consorzioimg.it">direzione@consorzioimg.it</a> <a href="mailto:ruben.tessara@nobentoscicurezza.it">ruben.tessara@nobentoscicurezza.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X
			TRASGO SRL		ANDRE ZAMUDIO	392-8694206	<a href="mailto:aandres.ayona@gmail.com">aandres.ayona@gmail.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Pulizie area di mostra Exhibition Area cleaning services	Allegato 2.6	TEAM SERVICE Società Consorzio a r.l.		GIOVANNA CAPONE	06 51576 340	<a href="mailto:gcapone@teamservice.it">gcapone@teamservice.it</a> <a href="mailto:sicurezza@teamservice.it">sicurezza@teamservice.it</a>	PADIGLIONI PAVILIONS	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
		FIDENTE SPA B&B SERVICE	SEBA SYSTEM SRL	DARIO ACCROGLIANO	327-7875002	<a href="mailto:roberta.lanzi@fidente.it">roberta.lanzi@fidente.it</a> <a href="mailto:mauro.sciamanna50@gmail.com">mauro.sciamanna50@gmail.com</a>	CORSO ITALIA - C.S. - PORTA EST-PORTA OVEST - PADIGLIONI	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
		GRUPPO B&C SRL	FALCO SRL	SALVATORE PICIOCCHI NERMINA HURIC	348-2554853 342-3883758	<a href="mailto:amministrazione@grupposicurezza.it">amministrazione@grupposicurezza.it</a> <a href="mailto:ufficio.personale@grupposicurezza.it">ufficio.personale@grupposicurezza.it</a> <a href="mailto:stefano@blusicurezza.it">stefano@blusicurezza.it</a>	CORSO ITALIA - C.S. - PORTA EST-PORTA OVEST - PADIGLIONI	X	X	X	X	X	X	X	X	X	X	X	X	X	X	





Elenco Appaltatori e cronoprogramma dei lavori **Fiera Milano S.p.A.**  
 - List of contractors and work schedule **Fiera Milano Spa**

ALL.1\_rev.03\_2026

Manifestazione / Show: XYLEXPO COMPOSITES FUTURE 2026

Preposto Fiera Milano Fiera Milano Officer	Descrizione attività Appaltatore - Activity description Contractor	Scheda Lavorazione di riferimento - Reference Work sheet	Appaltatore - Contractor	Sub Appaltatore - Sub contractor	RESPONSABILE APPALTATORE - CONTRACTOR MANAGER			Area interessata dai lavori - Area affected by the works	MONTAGGIO Setting up								ESPOSIZIONE Show	SMONTAGGIO Dismantling			
					Nominativo - Name	Telefono - Phone	Mail		MONTAGGIO UFFICIALE ESPOSITORI Official Exhibitors Setting up									SMONTAGGIO UFFICIALE ESPOSITORI Official Exhibitors Dismantling			
								02-giu	03-giu	04-giu	05-giu	06-giu	07-giu	08-giu	DAL 9 AL 12/06	12-giu	13-giu	14-giu	15-giu		
STELLA	Asportazione rifiuti dal Quartiere Waste removal	Allegato 2.10	A.SER. SPA	ECONORD NUOVA CLEAN POLIRECUPERI SRL CARONNI GROUP SRL IGER SRL AG7 SRL GRUPPO MAURO SAVIOLA AZA RECYCLING	ALESSANDRA CONTE	02-9399891	<a href="mailto:conte@aserspa.net">conte@aserspa.net</a> <a href="mailto:tecnico@aserspa.net">tecnico@aserspa.net</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Smaltimento rifiuti speciali Special waste disposal	Allegato 2.10	AMISERVICE SRL			347-2633923	<a href="mailto:info@amiservice srl.com">info@amiservice srl.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Attività di pest control (profilassi antimurina e monitoraggio insetti striscianti e roditori in area interna ed esterna, profilassi entomocida contro gli insetti volanti) Pest control	Allegato 2.6	VERDEBLU SRL			GIANFRANCO CASSANI	335-642413 02-93500484	<a href="mailto:info@verdeblu srl.it">info@verdeblu srl.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X
	Richieste per smaltimento dei rifiuti Requests for waste disposal	Allegato 2.10	AMISERVICE SRL				347-2633923	<a href="mailto:info@amiservice srl.com">info@amiservice srl.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X
LEPORATI CORNACCHIA	Verifica Estintori nelle aree comuni Check Fire extinguishers in common areas	Allegato 2.9	CSQ ESTINTORI SRL		DOMENICO MASCIANGELO	328-3874334	<a href="mailto:info@csqitalia.com">info@csqitalia.com</a> <a href="mailto:masciangelo@csqali.it">masciangelo@csqali.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X					
	Noleggio Estintori agli Espositori Fire extinguishers exhibitor rental	Allegato 2.9	CSQ ESTINTORI SRL		DOMENICO MASCIANGELO	328-3874334	<a href="mailto:info@csqitalia.com">info@csqitalia.com</a> <a href="mailto:masciangelo@csqali.it">masciangelo@csqali.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	
	Segnaletica sicurezza di mostra Exhibition safety sign service	Allegato 2.13	CSQ ESTINTORI SRL		DOMENICO MASCIANGELO	328-3874334	<a href="mailto:info@csqitalia.com">info@csqitalia.com</a> <a href="mailto:masciangelo@csqali.it">masciangelo@csqali.it</a> <a href="mailto:c.antonini@csqitalia.com">c.antonini@csqitalia.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X
	Presidio sicurezza di mostra e Controllo Allestimenti Exhibition safety Control and Stand control Office	Allegato 2.14	GAE ENGINEERING SRL		CHIARA AMARO	011 - 0566426 #n13	<a href="mailto:presidio.sicurezza@gae-engineering.com">presidio.sicurezza@gae-engineering.com</a> <a href="mailto:chiara.amaro@gae-engineering.com">chiara.amaro@gae-engineering.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X
	Servizio Primo soccorso medico Medical first aid service	Allegato 2.12	ATI CROCE ROSSA CROCE BIANCA MILANO ANPAS COMITATO REGIONALE LOMBARDIA ODV		FRANCESCO BURDO	02-3883223 334-6839686	<a href="mailto:francesco.burdo@crimilano.it">francesco.burdo@crimilano.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X	X	X	X	X
	Certificazioni strutture sospese Certifications suspended structures	Allegato 2.12	IB PROJECT SRL		MICHELE VITAGLIANO	329-6328698	<a href="mailto:relazioni@ibproject.it">relazioni@ibproject.it</a> <a href="mailto:mvitagliano@ibproject.it">mvitagliano@ibproject.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X				
	Collaudi strutture sospese Testing suspended structures	Allegato 2.12	GAE ENGINEERING SRL		CHIARA AMARO	011 - 0566426 #n13	<a href="mailto:FieraMilano@gae-engineering.com">FieraMilano@gae-engineering.com</a> <a href="mailto:chiara.amaro@gae-engineering.com">chiara.amaro@gae-engineering.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X				
	Certificazioni e collaudi strutture Certifications and testing structures	Allegato 2.12	GAE ENGINEERING SRL		CHIARA AMARO	011 - 0566426 #n13	<a href="mailto:FieraMilano@gae-engineering.com">FieraMilano@gae-engineering.com</a> <a href="mailto:chiara.amaro@gae-engineering.com">chiara.amaro@gae-engineering.com</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X	X				
NOCETI	Sorveglianza Surveillance	Allegato 2.12	SICURTALIA GROUP SERVICE SPA SICURTALIA SPA SERVIZI DI SICUREZZA SPA	GF SERVICE SRL HERMES SRL NOC SECURITY SRL SECUREFFE SRL SELPOL SRL PRIME SERVICE SRL SOGEST ITALIA SRL	LUIGI NAPOLITANO	345-7248200	<a href="mailto:ufficio.hse@sicurtalia.it">ufficio.hse@sicurtalia.it</a> <a href="mailto:ufficiodocumentazione@sicurtalia.it">ufficiodocumentazione@sicurtalia.it</a> <a href="mailto:comando.fierahse@sicurtalia.it">comando.fierahse@sicurtalia.it</a> <a href="mailto:rc.noc@sicurtalia.it">rc.noc@sicurtalia.it</a> <a href="mailto:d.comandoro@sicurtalia.it">d.comandoro@sicurtalia.it</a> <a href="mailto:m.cavalleri@sicurtalia.it">m.cavalleri@sicurtalia.it</a> <a href="mailto:lnapolitano@sicurtalia.it">lnapolitano@sicurtalia.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X					X
	Presidio tornelli Reception surveillance services	Allegato 2.12	COOP F.E.M.A.A. RL		ANDREA MAJOCCHI	335-5306755	<a href="mailto:andrea.majocchi@coopfema.it">andrea.majocchi@coopfema.it</a>	TUTTA L'AREA DELLA MOSTRA THE WHOLE AREA OF THE EXHIBITION	X	X	X	X	X	X	X	X					X







# UPDATED SURVEY

## D.U.V.R.I.

Unified Document for the Assessment of Interference Risks among concomitant activities carried out in the same work environment  
(pursuant to the provisions of Art. 26 of Italian Leg. Decree 81/2008 and amendments)

---

## ANNEXED 2

Worksheets with information on the specific risks inherent in the activities of each contractor that may generate interference, in addition to the prevention measures to be taken

## List of Worksheets:

<b>Contractor Activity</b>	<b>Reference worksheet</b>
Ground marking of the exhibition area	2.1
Installation of hanging points and fitting of hung structures	2.2
Carpet laying and removal	2.3
Construction, connection and activation of the systems for the event	2.4
Assembly and disassembly of stands and structures in the exhibition area	2.5
Cleaning of the areas affected by the event	2.6
Delivery and collection of furniture, accessories, special equipment and heavy handling	2.7
Delivery and collection of packaging	2.8
Fire extinguisher control and rental service to Exhibitors	2.9
Collection hazardous and non-hazardous waste	2.10
Food and beverage services, catering and trading activities	2.11
Control, check, porter and reception services	2.12
Installation and removal of signposting	2.13
Inspection activities	2.14

Sheet n° 2.1			Ground marking of the exhibition area		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input type="checkbox"/> Disassembly		
Activity description			The activity consists in placing adhesive tape on the floor of the pavilion or outdoor areas, according to the project of the exhibition layout of the event.		
Equipment used			cutters, rolls of adhesive tape, tools and work equipment, etc.		
Assessment of interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Valutazione del rischio mitigato
<b>Hazard</b> Of generating obstacles in pedestrian paths	<b>Interference risk</b> Impacts, falls and level slipping	<b>Consequences</b> Personal injuries	- Information and training of operators - Control the work areas and make sure that there are no people nearby - Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles	See table n° 7.1	Low 1
<b>Frequency</b> Low 2	<b>Magnitude</b> Medium 2	<b>Estimated risk</b> Medium 4	<b>Control</b> Medium 3		
<b>Hazard</b> positioning of materials, waste and scraps on the ground	<b>Interference risk</b> Cuts, abrasions	<b>Consequences</b> Personal injuries including serious ones	- Information and training of operators - Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles - Removal of waste and scraps from work areas	See table n° 7.1	Low 1
<b>Frequency</b> Low 2	<b>Magnitude</b> Medium 2	<b>Estimated risk</b> Medium 4	<b>Control</b> Medium 3		

Sheet n° 2.2			Installation of hanging points and fitting of hung structures		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			<ul style="list-style-type: none"> <li>- The company is responsible for the work necessary for the construction, and subsequent removal, of suspensions to the ceiling of the pavilions in the area affected by the event.</li> <li>- The activity consists in anchoring only the cables to the ceiling of the pavilions to allow the hanging of structures at a height, or the complete assembly of the suspended structure as indicated by a technical project.</li> </ul>		
Equipment used			<ul style="list-style-type: none"> <li>- Vehicles, electric and internal combustion engine forklifts, mobile elevating platforms, electric pantograph platform, ladders, scaffolding, tools and work equipment, pallet trucks, hand trolleys, push containers with wheels, portable electrical equipment, work area delimitation equipment, etc.</li> </ul>		
Assessment of interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of vehicles, mobile elevating platforms and vehicles in general and load handling operations	<b>Interference risk</b> Crushing, impacts, falls of materials, equipment and people	<b>Consequences</b> Personal injuries, including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Controlling/delimiting work areas and ensuring that there are no people nearby</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- During the manoeuvres, the operator will be assisted by a colleague on the ground to control the work area.</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Presence of various moving vehicles (pallet trucks, forklifts, vehicles, etc..) or obstacles in the work areas	<b>Interference risk</b> Fall of materials, equipment, people crushing	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- The operator must organise his activity by limiting the use of ladders and adopting suitable equipment.</li> <li>- In case of work at height, the operator must use third category PPE (slings)</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Work at height with the use of	<b>Interference risk</b> Fall of materials, equipment, people	<b>Consequences</b> Personal injuries	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> </ul>	<b>See table n° 7.1</b>	Medium 4

tools and materials	crushing	including very serious ones	<ul style="list-style-type: none"> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- Do not place materials, equipment or anything else, even temporarily, on the structures and systems used</li> </ul>		
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium high 12	<b>Control</b> Medium 3		
<b>Hazard</b> Use of hanging anchor chains, positioning of materials on the floor	<b>Interference risk</b> Impacts, falls, slipping	<b>Consequences</b> Personal injuries, including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Properly signal hanging structures at a dangerous height</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		
<b>Danger</b> positioning of materials, waste and scraps on the ground and for the use of machinery and equipment	<b>Interference risk</b> Cuts, abrasions, impacts	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> <li>- Removal of waste and scraps from work areas</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		
<b>Hazard</b> Noise	<b>Interference risk</b> Exhibition	<b>Consequences</b> Hypoacusis	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- It is the Contractor's duty to implement all the technical measures necessary to reduce the emission of noise caused by the work carried out by its operators. If this is not possible, it is necessary to inform people nearby to use appropriate PPE for hearing protection</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Low 2	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium 6	<b>Control</b> Low 2		

Sheet n° 2.3			Carpet laying and removal		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			The company takes care of the work necessary to lay and remove the carpet on the floor in the area affected by the event.		
Equipment used:			vehicles, internal combustion engine and electric forklifts, tools and work equipment, cutters, double-sided adhesive tape, carpet rolls, pallet trucks, hand trolleys, tractors with trolley towing, equipment for delimiting work areas, etc.		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> use of vehicles and motor vehicles in general and load handling operations	<b>Interference risk</b> crushing, bumping, fall of materials, equipment, people	<b>Consequences</b> Personal injuries including very serious ones	Information and training of operators Control the work areas and make sure that there are no people nearby During the manoeuvres, the operator must be assisted by a colleague on the ground	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> positioning of materials, waste and scraps on the ground	<b>Interference risk</b> Cuts, abrasions, impacts	<b>Consequences</b> Personal injuries including serious ones	Information and training of operators Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles Removal of waste and scraps from work areas Ensure that the work area is always controlled and/or delimited	<b>See table n° 7.1</b>	Low 2
<b>Frequency</b> Medium 3	<b>Magnitude</b> Medium 2	<b>Estimated risk</b> Medium 6	<b>Control</b> Medium 3		
<b>Hazard</b> Use of means for lifting and handling loads (forklift truck, crane or other)	<b>Interference risk</b> Crushing, impacts, falls of materials, equipment, people	<b>Consequences</b> Personal injuries including very serious ones	Information and training of operators Ensure that the work area is always controlled and/or delimited Suspended loads, whatever their nature, must always be properly secured During the manoeuvres, the operator must be assisted by a colleague on the ground	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		

Sheet n° 2.4			Construction, connection and activation of the systems for the event		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			<p>The company takes care of the work necessary to build and maintain the temporary systems of the event, both on the ground and at a height.</p> <p>The activity consists of the work required to prepare the special systems requested by the Exhibitors and/or temporarily connect the fixed systems of the pavilions with the temporary systems of the stands under preparation. The special systems refer, but not exhaustively, to the following type: electrical systems and additional lines, plumbing, heating and sanitary facilities, gas systems, extractor hoods, audio and video systems, lighting engineering, installation of suspended structures, food equipment, etc.</p>		
Equipment used			<p>Vehicles, electric and internal combustion engine forklifts, mobile elevating platforms, electric pantograph platform, ladders, scaffoldings, push containers with wheels, pallet trucks, hand trolleys, electric cables, pipes and cables mobile trolley, tools and work equipment, welding machines, electric material, plumbing material, audio/video equipment, portable electric equipment, equipment to delimit work areas, etc.</p>		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of vehicles, mobile elevating platforms and vehicles in general and load handling operations both inside and outside the halls	<b>Interference risk</b> Crushing, impacts, falls of materials, equipment, people	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Controlling/delimiting work areas and ensuring that there are no people nearby</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- During the manoeuvres, the operator must be assisted by a colleague on the ground</li> <li>- Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes</li> <li>- In case of use of mobile elevating platforms in transit routes, provide for the presence of an operator on the ground to control the routes in order to avoid interference</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		

<p><b>Hazard</b> Presence nearby the working areas of various vehicles in motion (pallet trucks, forklifts, vehicles, etc...) or presence of obstacles in the paths</p>	<p><b>Interference risk</b> Fall of people and/or material, impacts</p>	<p><b>Consequences</b> Personal injuries including very serious ones</p>	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- The operator must organise his/her activity by limiting the use of ladders and adopting suitable equipment.</li> <li>- In case of work at height, the operator must use third category PPE (slings)</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> </ul>	<p><b>See table n° 7.1</b></p>	<p>Medium 4</p>
<p><b>Frequency</b> Medium 3</p>	<p><b>Magnitude</b> Very severe 4</p>	<p><b>Estimated risk</b> Medium High 12</p>	<p><b>Control</b> Medium 3</p>		
<p><b>Hazard</b> Work at height with the use of tools and materials</p>	<p><b>Interference risk</b> Fall of materials, equipment, people</p>	<p><b>Consequences</b> Personal injuries including very serious ones</p>	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- Do not place materials, equipment or anything else, even temporarily, on the structures and systems used</li> </ul>	<p><b>See table n° 7.1</b></p>	<p>Medium 4</p>
<p><b>Frequency</b> Medium 3</p>	<p><b>Magnitude</b> Very severe 4</p>	<p><b>Estimated risk</b> Medium high 12</p>	<p><b>Control</b> Medium 3</p>		
<p><b>Danger</b> positioning of materials, waste and scraps on the ground and for the use of machinery and equipment</p>	<p><b>Interference risk</b> Cuts, abrasions, impacts</p>	<p><b>Consequences</b> Personal injuries including serious ones</p>	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> <li>- Removal of waste and scraps from work areas</li> </ul>	<p><b>See table n° 7.1</b></p>	<p>Low 3</p>
<p><b>Frequency</b> Medium 3</p>	<p><b>Magnitude</b> Severe 3</p>	<p><b>Estimated risk</b> Medium High 9</p>	<p><b>Control</b> Medium 3</p>		
<p><b>Hazard</b> Noise</p>	<p><b>Interference risk</b> Exhibition</p>	<p><b>Consequences</b> Hypoacusis</p>	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- It is the Contractor's duty to implement all the technical measures necessary to reduce the emission of noise caused by the work carried out by its operators. If this is not possible, it is necessary to inform people nearby to use appropriate PPE for hearing protection</li> </ul>	<p><b>See table n° 7.1</b></p>	<p>Low 3</p>

<b>Frequency</b> Low 2	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium 6	<b>Control</b> Low 2		
<b>Hazard</b> Removal of the service pit cover	<b>Interference risk</b> Fall	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Protect and signal areas without cover in a very visible manner</li> <li>- Close the pits once the work has been completed</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		

Sheet n° 2.5			Assembly and disassembly of stands and structures in the exhibition area		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			<p>The company takes care of the work necessary for the construction of the stands and structures in the exhibition area of the event, such as curtain walls, curtains, signs, refreshment areas, conference rooms, common areas, etc.</p> <p>The activity consists in the assembly and disassembly of structures on the ground and suspended, in customised areas, pre-fitted and in common areas. The works can be carried out on the ground and at a height, and consist in the assembly on site of prefabricated structures in accordance with the technical project.</p>		
Equipment used:			vehicles, electric and internal combustion engine forklifts, ladders, scaffolding, mobile elevating platforms, electric pantograph platform, pallet trucks, hand trolleys, push containers with wheels, tools and work equipment, building materials, rollers, brushes, paints, welding machines, electrical equipment, circular saws, portable electrical equipment, equipment for delimiting work areas, etc.		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of vehicles, mobile elevating platforms and vehicles in general and load handling operations both inside and outside the halls	<b>Interference risk</b> Fall of equipment, materials, people, impacts	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Controlling/delimiting work areas and ensuring that there are no people nearby</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- During the manoeuvres, the operator must be assisted by a colleague on the ground</li> <li>- Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes</li> <li>- In case of use of mobile elevating platforms in transit routes, provide for the presence of an operator on the ground to control the routes in order to avoid interference</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Of generating obstacles in pedestrian paths	<b>Interference risk</b> Impacts, falls and level slipping	<b>Consequences</b> Personal injuries	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Control the work areas and make sure that there are no people nearby</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the</li> </ul>	<b>See table n° 7.1</b>	Low 2

			encumbrance in order to facilitate the transit of people and vehicles		
<b>Frequency</b> Medium 3	<b>Magnitude</b> Medium 2	<b>Estimated risk</b> Medium 6	<b>Control</b> Medium 3		
<b>Hazard</b> Presence nearby the working areas of various vehicles in motion (pallet trucks, forklifts, vehicles, etc...) or presence of obstacles in the paths	<b>Interference risk</b> Fall of people and/or material, equipment	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- The operator must organise his/her activity by limiting the use of ladders and adopting suitable equipment.</li> <li>- In case of work at height, the operator must use third category PPE (slings)</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Work at height with the use of tools and materials	<b>Interference risk</b> Crushing Fall of materials, equipment, people	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- Do not place materials, equipment or anything else, even temporarily, on the structures and systems used</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium high 12	<b>Control</b> Medium 3		
<b>Hazard</b> Use of hanging anchor chains, positioning of materials on the floor	<b>Interference risk</b> Impacts, falls, slipping	<b>Consequences</b> Personal injuries, including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Properly signal hanging structures at a dangerous height</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		
<b>Danger</b> positioning of materials, waste and scraps on the ground and for the use of	<b>Interference risk</b> Cuts, abrasions, impacts	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and</li> </ul>	<b>See table n° 7.1</b>	Low 3

machinery and equipment			work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles - Removal of waste and scraps from work areas		
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		
<b>Hazard</b> Noise	<b>Interference risk</b> Exhibition	<b>Consequences</b> Hypacusis	Information and training of operators - It is the Contractor's duty to implement all the technical measures necessary to reduce the emission of noise caused by the work carried out by its operators. If this is not possible, it is necessary to inform people nearby to use appropriate PPE for hearing protection	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Low 2	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium 6	<b>Control</b> Low 2		
<b>Hazard</b> Removal of the service pit cover	<b>Interference Risk</b> Fall	<b>Consequences</b> Personal injuries including serious ones	Information and training of operators - Ensure that the work area is always controlled and/or delimited - Protect and signal areas without cover in a very visible manner - Close the pits once the work has been completed	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		

Sheet n° 2.6			Cleaning of the areas affected by the event		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			The works can be referred, not exhaustively, to the following activities: initial, maintenance and final operations relating to the cleaning of environments in general (lounges, aisles, common areas, toilets, brush-washing rooms, outdoor area of the pavilions, other environments, etc.), floor cleaning with the aid of machinery and equipment, separate waste collection using wheeled containers and transfer to dedicated containers located outside the pavilions, distribution of standing fire extinguishers in the aisles, supervision of personnel in the exhibition area and toilets.		
Equipment used			Vehicles, tools and manual work equipment, cleaning machines (scrubber driers, monobrushers, sweepers, street sweepers, blowers), push containers with wheels, cleaning products in general, detergents, descalers, wax removers, solvents, disinfectants, sanitizers		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of cleaning machines or vehicles and vehicles in general.	<b>Interference risk</b> Impacts, crushing Fall of material	<b>Consequences</b> Personal injuries including very serious ones	Information and training of operators Control the work areas and make sure that there are no people nearby Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium high 12	<b>Control</b> Medium 3		
<b>Hazard</b> Presence of obstacles in pedestrian paths and/or slippery floor	<b>Interference risk</b> Impacts, falls and level slipping	<b>Consequences</b> Personal injuries including serious ones	Information and training of operators Control the work areas and make sure that there are no people nearby Use signs to indicate slippery areas of the floor that have been cleaned Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium high 9	<b>Control</b> Medium 3		
<b>Hazard</b> Use of machinery and equipment for work	<b>Interference risk</b> Cuts, abrasions, impacts	<b>Consequences</b> Personal injuries including serious ones	Information and training of operators Avoid the disorderly presence of material and work equipment, limiting as much as possible the	<b>See table n° 7.1</b>	Low 3

			encumbrance in order to facilitate the transit of people and vehicles		
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		
<b>Hazard</b> Use of various detergents	<b>Interference risk</b> Exposure to chemical and biological agents	<b>Consequences</b> Personal injuries	Information and training of operators The detergents used have the European Ecolabel issued by the Ecolabel-Ecoaudit Committee, which classifies them as "ecolabel products"	<b>See table n° 7.1</b>	Low 2
<b>Frequency</b> Low 2	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium 6	<b>Control</b> High 4		

Sheet n° 2.7			Delivery and collection of furniture, accessories, special equipment and heavy handling		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			<p>The company takes care of the works necessary to deliver in and / or collect from the event area display goods, furniture and accessories, flowers, plants, decorations, special equipment such as safes, office equipment, reception equipment, equipment for kitchens and catering services, etc. in addition to heavy handling of machinery, extraordinary loads, special structures, or otherwise.</p> <p>The activity consists in transporting and/or taking the material from the dedicated storages and transferring it to the agreed areas of the exhibition.</p>		
Equipment used			vehicles, electric and internal combustion engine forklifts, pallet trucks, hand trolleys, push containers with wheels, tractors with trolley towing, hand trolleys, tools, portable electrical equipment, equipment for delimiting work areas, etc. and for heavy handling of cranes and forklifts with heavy duty capacity.		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of means for lifting and handling loads (forklift truck, crane or other)	<b>Interference risk</b> Impacts, falls of equipment and materials, crushing	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- During the manoeuvres, the operator must be assisted by a colleague on the ground</li> <li>- Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium high 12	<b>Control</b> Medium 3		
<b>Danger</b> positioning of materials, waste and scraps on the ground	<b>Interference risk</b> Impacts, falls and slipping	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> <li>- Avoid placing packages in transit areas</li> <li>- Removal of waste and scraps from work areas</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		

Sheet n° 2.8			Delivery and collection of packaging		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			The company takes care of the works necessary to deliver in and/or collect packaging from the event area. The activity consists in transporting and/or taking the material from the dedicated depots and transferring them to the agreed areas of the event, in addition to the heavy handling of machinery, extraordinary loads, special structures, or other.		
Equipment used			vehicles, electric and internal combustion engine forklifts, pallet trucks, hand trolleys, push containers with wheels, tractors with trolley towing, hand trolleys, tools, portable electrical equipment, equipment for delimiting work areas, etc.		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of means for lifting and handling loads (forklift truck, crane or other)	<b>Interference risk</b> Impacts, falls of equipment and materials, crushing	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- During the manoeuvres, the operator must be assisted by a colleague on the ground</li> <li>- Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium high 12	<b>Control</b> Medium 3		
<b>Danger</b> positioning of materials, waste and scraps on the ground	<b>Interference risk</b> Impacts, falls and slipping	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> <li>- Avoid placing packages in transit areas</li> <li>- Removal of waste and scraps from work areas</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		

Sheet n° 2.9			Fire extinguisher control and rental service to Exhibitors		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			<p>The company in charge of controlling fire extinguishers in the pavilions is responsible for controlling all fire extinguishers present in the area affected by the event, in accordance with the UNI standard. The company also takes care of the delivery and collection at the end of the exhibition of the fire extinguishers rented to the Exhibitors.</p> <p><u>Equipment used:</u> vehicles, pallet trucks, hand trolleys, etc.</p> <p>The Contractors are obliged to use suitable PPE, wear high visibility clothing and verify that, before starting their own activity, the conditions of the working environment do not jeopardise the safety of people.</p>		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of vehicles and motor vehicles in general and load handling operations both inside and outside the halls	<b>Interference risk</b> Impacts, falls of equipment and materials, crushing	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes</li> <li>- Fiera Milano, through its road operators, checks compliance with the requirements set out in the previous points</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Danger</b> positioning of materials on the ground	<b>Interference risk</b> Impacts, falls and slipping	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		

Sheet n° 2.10			Collection hazardous and non-hazardous waste		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			<p>The company carries out the works necessary for the removal of waste in the area affected by the event.</p> <p>The activity consists in the separate collection of waste (garbage, waste material, abandoned material, emptying of baskets, etc.) both inside and outside the pavilions, and the transfer of the same in the dedicated spaces, as well as in the work necessary for packaging, the loading, transport and transfer to a suitable disposal plant of hazardous and non-hazardous special waste.</p> <p><u>Equipment used:</u> vehicles equipped with a compactor, crane trucks equipped with mechanical arms for the collection with "claws", work equipment, push containers with wheels, cleaning products in general, portable electrical equipment, equipment to delimit the work areas, etc.</p> <p>The Contractors are obliged to use suitable PPE, wear high visibility clothing and verify that, before starting their own activity, the conditions of the working environment do not jeopardise the safety of people.</p>		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of vehicles and motor vehicles in general and collection operations	<b>Interference risk</b> Impacts, fall of materials and waste, crushing	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Control the work areas and make sure that there are no people nearby</li> <li>- During the manoeuvres of the "claws" the operator must be assisted by a colleague on the ground</li> <li>- Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Waste material transported at height by the Claws or Crane truck	<b>Interference risk</b> Hits, crushing falls of materials, waste	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- Do not place materials, equipment or anything else, even temporarily, on the structures and systems used</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium high 12	<b>Control</b> Medium 3		

<p><b>Hazard</b> positioning of materials, waste and scraps on the ground</p>	<p><b>Interference risk</b> Cuts, abrasions, impacts, falls and slipping</p>	<p><b>Consequences</b> Personal injuries including serious ones</p>	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> <li>- Removal of waste and scraps from work areas</li> </ul>	<p><b>See table n° 7.1</b></p>	<p>Low 3</p>
<p><b>Frequency</b> Medium 3</p>	<p><b>Magnitude</b> Severe 3</p>	<p><b>Estimated risk</b> Medium High 9</p>	<p><b>Control</b> Medium 3</p>		
<p><b>Hazard</b> Noise</p>	<p><b>Interference risk</b> Exhibition</p>	<p><b>Consequences</b> Hypoacusis</p>	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- It is the Contractor's duty to implement all the technical measures necessary to reduce the emission of noise caused by the work carried out by its operators. If this is not possible, it is necessary to inform people nearby to use appropriate PPE for hearing protection</li> </ul>	<p><b>See table n° 7.1</b></p>	<p>Low 3</p>
<p><b>Frequency</b> Low 2</p>	<p><b>Magnitude</b> Severe 3</p>	<p><b>Estimated risk</b> Medium 6</p>	<p><b>Control</b> Low 2</p>		

Sheet n° 2.11			Food and beverage services, catering and trading activities		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Exhibition <input checked="" type="checkbox"/> Disassembly		
Activity description			<p>The company deals with services for catering and trading activities in the area affected by the event.</p> <p>The activity takes place in the dedicated premises/area and consists in the catering service and sale of products to people at scheduled times, as well as all the processes related to the supply, procurement, storage of the goods treated in the premises in use.</p> <p>These activities are related to the handling of food prepared and distributed to the public, the keeping of hygiene standards in the workplace and the transport of raw materials from storage warehouses to processing areas (kitchens, dedicated areas, bars, catering areas, etc.).</p>		
Equipment used			vehicles, electric and internal combustion engine forklifts, tractors with trolley towing, pallet trucks, hand trolleys, kitchen equipment, cleaning products, detergents, tools and work equipment in general, push containers with wheels, portable electrical equipment, equipment for delimiting work areas, etc.		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> use of vehicles and motor vehicles, general transportation equipment, and load handling operations both inside and outside the pavilions	<b>Interference risk</b> Crushing, impacts, falls of materials, equipment, people, collisions, incidents	<b>Consequences</b> Personal injuries including very serious ones	- Information and training of operators - Controlling/delimiting work areas and ensuring that there are no people nearby - Suspended loads, whatever their nature, must always be properly secured - During the manoeuvres, the operator will be assisted by a colleague on the ground to control the work area.	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Possible presence of materials, waste, scraps and liquids on the ground.	<b>Interference risk</b> Cuts, abrasions, impacts, falls and slipping	<b>Consequences</b> Personal injuries including serious ones	- Information and training of operators - Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and work equipment, limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles - Mark any slippery areas of the floor with appropriate signs	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		

<b>Hazard</b> Presence of flammable materials	<b>Interference risk</b> Fire, burns	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Do not store flammable materials near ignition sources</li> <li>- Clearly mark the presence of flammable materials with appropriate signage</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Presence and use of electrical and/or hot equipment	<b>Interference risk</b> Fire, electrocution, Indirect contact, Burns, abrasions	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Use of compliant equipment,</li> <li>- Perform regular maintenance on the equipment used,</li> <li>- Ensure compliant electrical connections</li> </ul>	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		
<b>Hazard</b> Presence of chemical products	<b>Interference risk</b> Exposure to chemical agents, burns, chemical spills, direct contact and/or inhalation of chemical fumes	<b>Consequences</b> Personal injuries including serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Use of products in accordance with their safety data sheets and technical specifications</li> <li>- Proper storage of products in designated rooms or cabinets</li> </ul>	<b>See table n° 7.1</b>	Low 2
<b>Frequency</b> Low 2	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium 6	<b>Control</b> Medium 3		

Sheet n° 2.12			Control, check, porter and reception services		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			The companies deal with check, security, control, porter, ticketing, reception and assistance services in the area affected by the event. The activities are carried out both inside and outside the pavilions, and consist of inspections and presence on shifts of personnel in charge of carrying out services related to the following types: armed surveillance services, fire vigilance, first aid, medical first aid, exhibition security control, road safety service, checks for facility certifications and testing, porter, reception, ticketing, assistance, TV shooting, photographic services, various services related to the event, etc.		
Equipment used			vehicles, individual weapons (security guards), office equipment, technological and telecommunication equipment, measuring and sampling equipment, equipment for delimiting work areas, etc.		
Interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of vehicles and motor vehicles in general both inside and outside the pavilions	<b>Interference risk</b> Impacts, falls of equipment and materials, crushing	<b>Consequences</b> Personal injuries including very serious ones	Information and training of operators Mainly use the defined routes identified in the exhibition layout of the event avoiding unnecessary routes	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> firearm	<b>Interference risk</b> Accidental explosion of shots from the firearm	<b>Consequences</b> Personal injuries including serious ones	Information and training of the Special Security Guard	<b>See table n° 7.1</b>	Low 3
<b>Frequency</b> Medium 3	<b>Magnitude</b> Severe 3	<b>Estimated risk</b> Medium High 9	<b>Control</b> Medium 3		

Sheet n° 2.13			Installation and removal of signposting		
Area concerned			Pavilions and outdoor areas		
Period concerned			<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description			The activity consists in positioning the signs of the event.		
Equipment used			Vehicles, mobile elevating platforms, electric pantograph platform, ladders, scaffolding, tools and work equipment, pallet trucks, hand trolleys, push containers with wheels, equipment for delimiting work areas, etc.		
Assessment of interference risks			Implemented protective measures adopted by the contractor	Implemented protective measures adopted to remove interference risks	Assessment of mitigated risk
<b>Hazard</b> Use of vehicles, mobile elevating platforms and vehicles in general	<b>Interference risk</b> Crushing, impacts, falls of materials, equipment and people	<b>Consequences</b> Personal injuries, including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Control the work areas and make sure that there are no people nearby</li> <li>- Always keep the work and transit areas clean and tidy, avoiding the disorderly presence of material and limiting as much as possible the encumbrance in order to facilitate the transit of people and vehicles</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		
<b>Hazard</b> Work at height with the use of tools and materials	<b>Interference risk</b> Fall of materials, equipment, people crushing	<b>Consequences</b> Personal injuries including very serious ones	<ul style="list-style-type: none"> <li>- Information and training of operators</li> <li>- Ensure that the work area is always controlled and/or delimited</li> <li>- Suspended loads, whatever their nature, must always be properly secured</li> <li>- Do not place materials, equipment or anything else, even temporarily, on the structures and systems used</li> </ul>	<b>See table n° 7.1</b>	Medium 4
<b>Frequency</b> Medium 3	<b>Magnitude</b> Very severe 4	<b>Estimated risk</b> Medium High 12	<b>Control</b> Medium 3		

Sheet n° 2.14	Inspection activities		
Area concerned	Pavilions and outdoor areas		
Period concerned	<input checked="" type="checkbox"/> Assembly <input checked="" type="checkbox"/> Disassembly		
Activity description	The company in charge of the control through visits, inspections in the set-up areas both inside and outside the pavilions.		
Equipment used	None		
<b>Assessment of interference risks</b>	<b>Implemented protective measures adopted by the contractor</b>	<b>Implemented protective measures adopted to remove interference risks</b>	<b>Assessment of mitigated risk</b>
The activities of companies are purely intellectual, with no resulting hazard.			